

FIVE BOW RECESSED CORNER

FBRC - with Flat lens

FBRCB - with Buried lens




FIVE BOW RECESSED CORNER FBRC & FBRCB

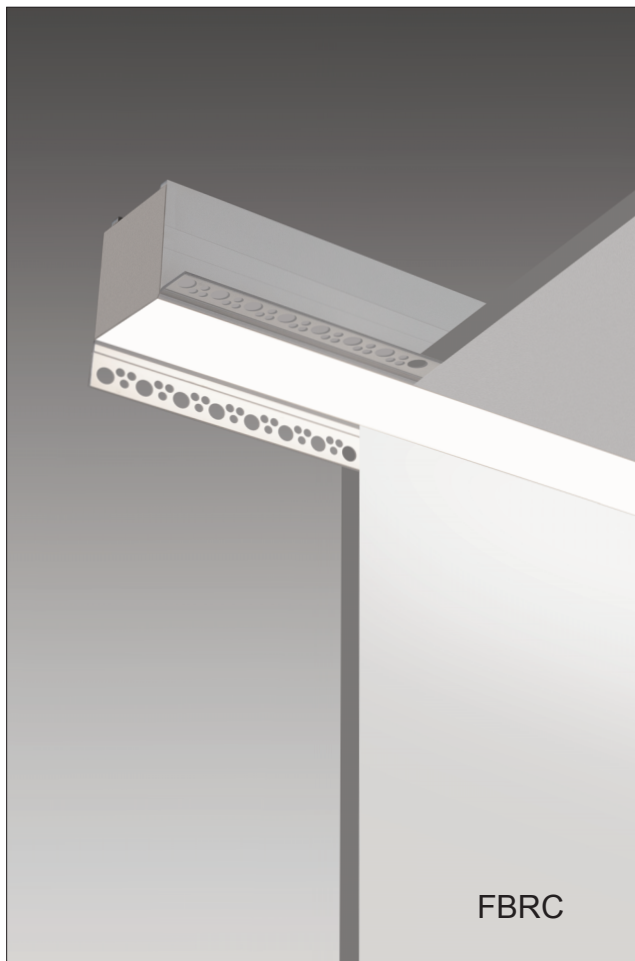


Dimensions

FBRC

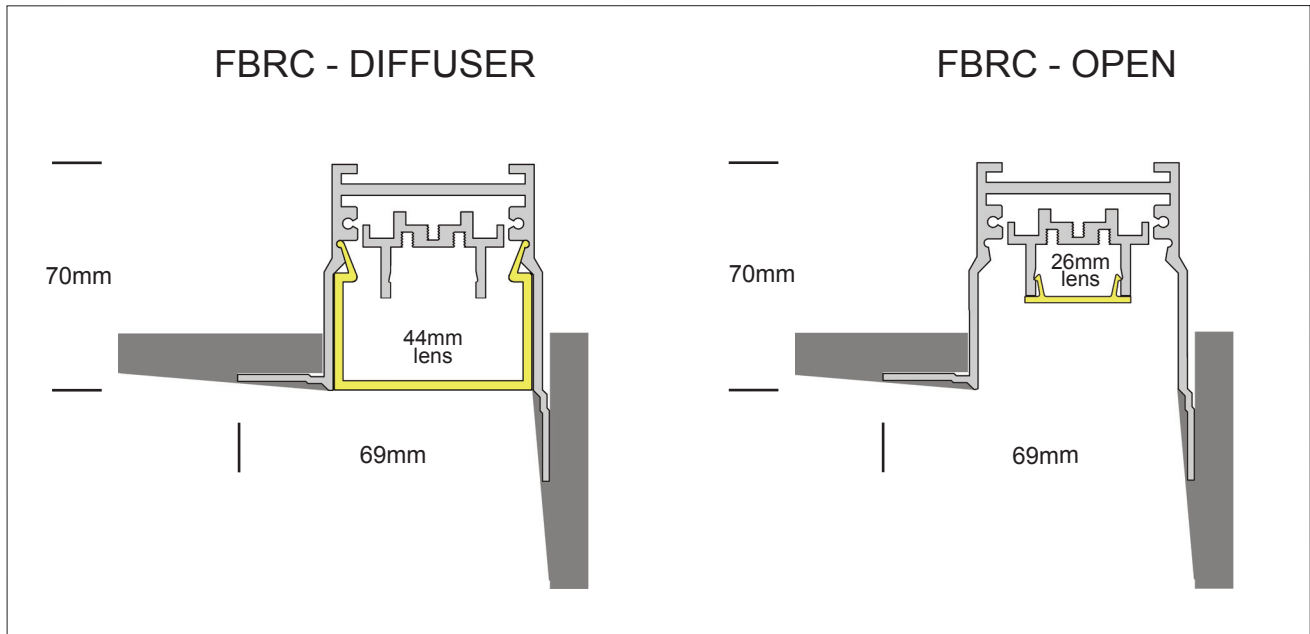

FBRCB

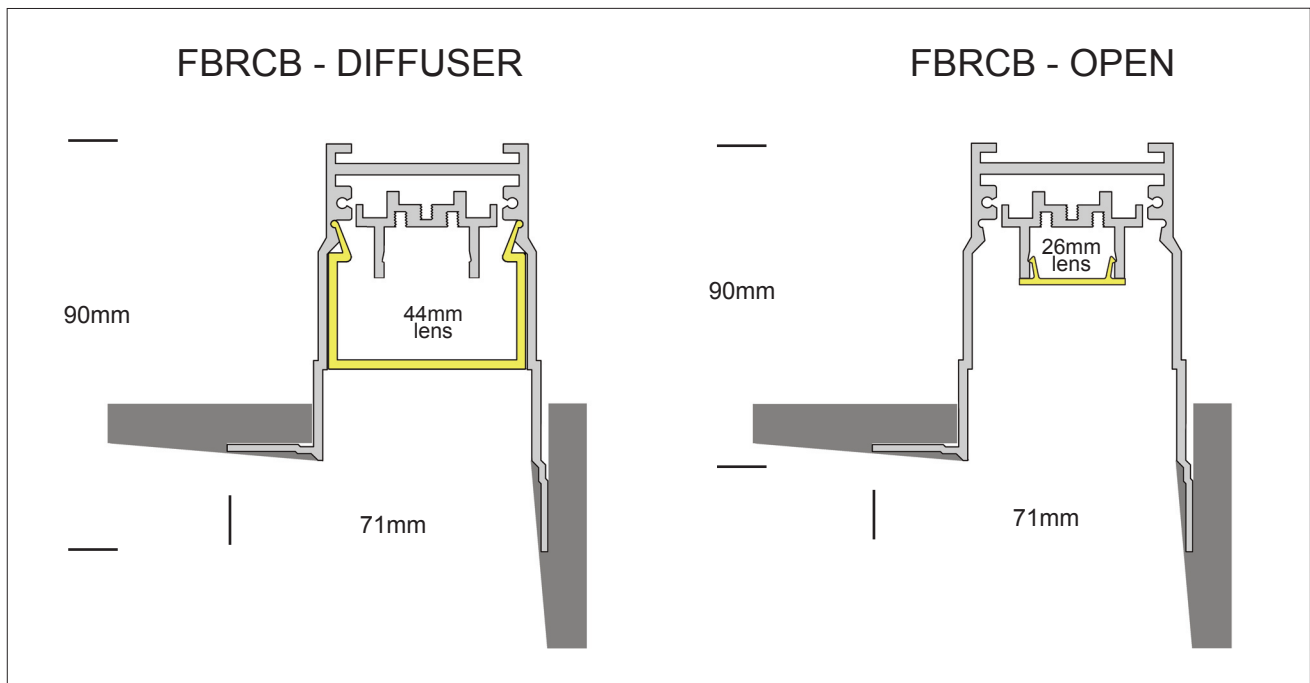


FIVE BOW RECESSED CORNER FBRC & FBRCB


ZALITE

Distribution


FBRC - DIFFUSER

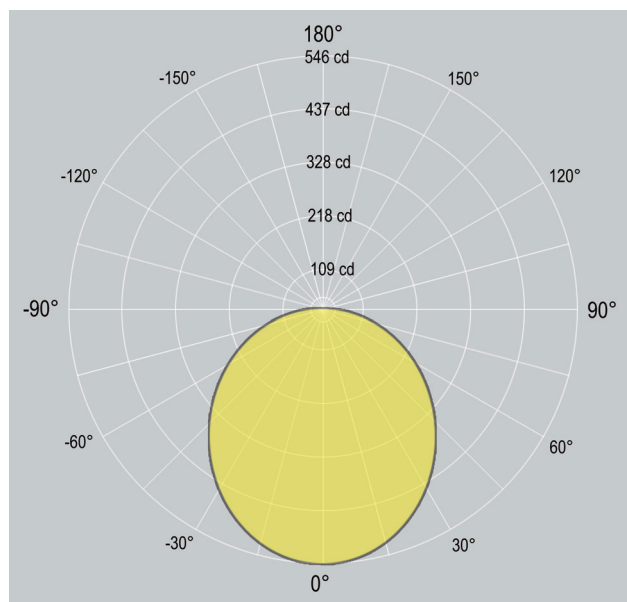


FBRC - OPEN

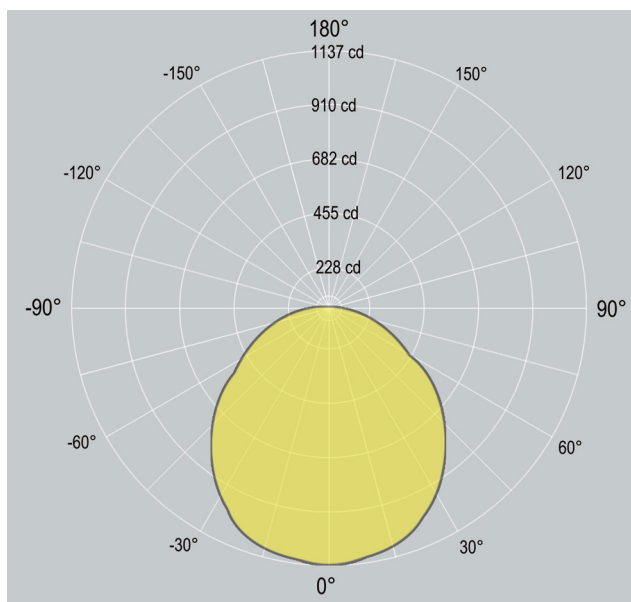

FBRCB - DIFFUSER

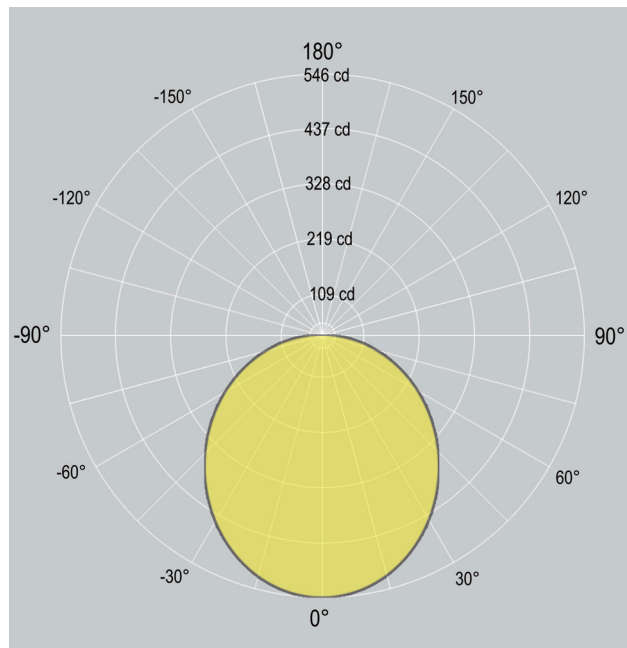

FBRCB - OPEN

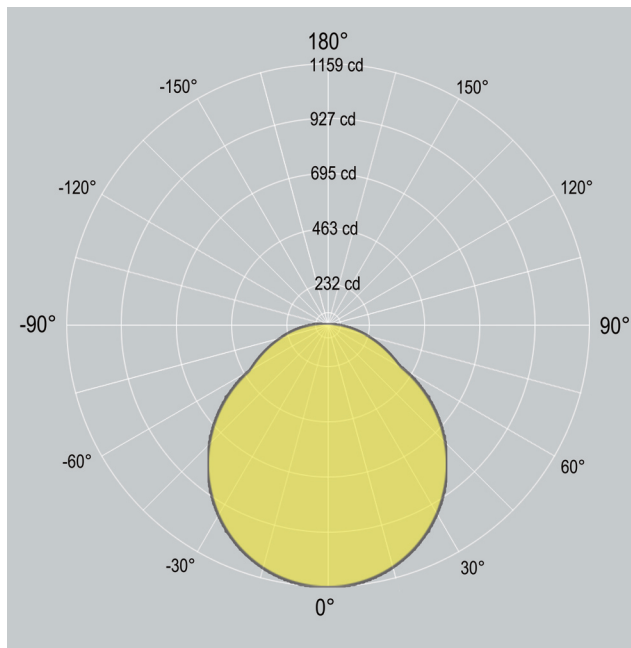

FIVE BOW RECESSED CORNER FBRC & FBRCB



1. Base Model

FBRC - DIFFUSER	Recessed - Flat Diffuser lens
FBRC - OPEN	Recessed - Open
FBRCB - DIFFUSER	Recessed - Buried Diffuser lens
FBRCB - OPEN	Recessed - Open

2. Run Length

Enter total linear length, (example: 6M)

3. Lamping

FBRC - Diffuser		
STD - xxxxK (example: STD-4000K)	Standard Output, LED 20W/M 1300 delivered lumen, 56 lm/W	HI -
xxxxK (example: HI-4000K)	High Output, LED 30W/M 1900 delivered lumen, 53 lm/W	

FBRC - Open		
STD - xxxxK (example: STD-4000K)	Standard Output, LED 20W/M 2050 delivered lumen, 86 lm/W	HI -
xxxxK (example: HI-4000K)	High Output, LED 30W/M 2850 delivered lumen, 82 lm/W	

FBRCB - Diffuser		
STD - xxxxK (example: STD-4000K)	Standard Output, LED 20W/M 1100 delivered lumen, 47 lm/W	HI -
xxxxK (example: HI-4000K)	High Output, LED 30W/M 2000 delivered lumen, 45 lm/W	

FBRCB Open		
STD - xxxxK (example: STD-4000K)	Standard Output, LED 20W/M 1750 delivered lumen, 75 lm/W	HI -
xxxxK (example: HI-4000K)	High Output, LED 30W/M 2500 delivered lumen, 71 lm/W	

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - xxxxK	Additional LED Options Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail
TW	Tunable White (2700K - 6500K) Contact factory for detail
RGBW	RGB+WHITE - 24/12VDC Contact factory for detail

4. Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

6. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
OTHER	Contact Factory

FIVE BOW RECESSED CORNER FBRC & FBRCB

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Options


Mitered Corners

Consult factory for mitered corner angle options.

Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Custom powdercoat options also available.



Mitered Corners




WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom/____



ISO 9001:2015