


---

# FIVE BOW RECESSED BURIED LENS - FBRTB

Recessed with Trim

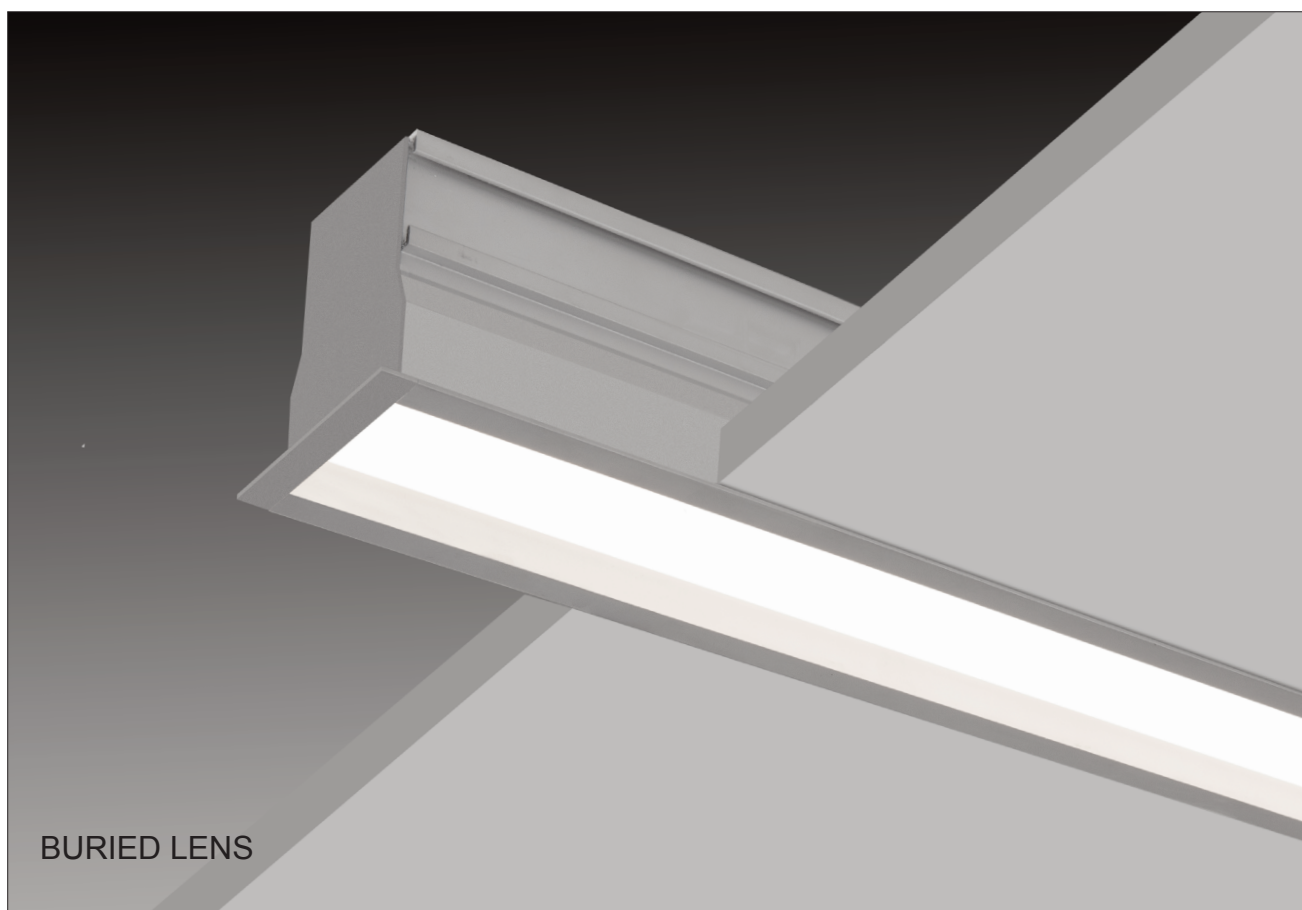


# FIVE BOW RECESSED BURIED LENS FBRTB



Recessed with Trim


## Dimensions

---

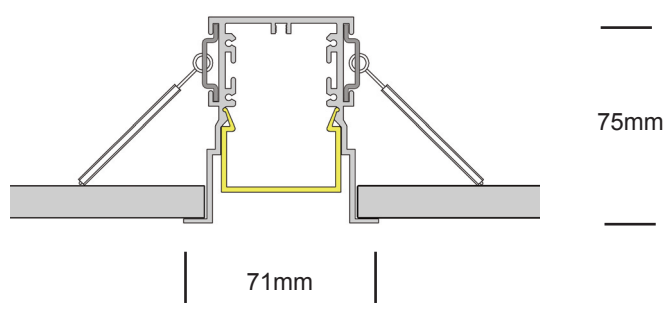

## Distribution

---

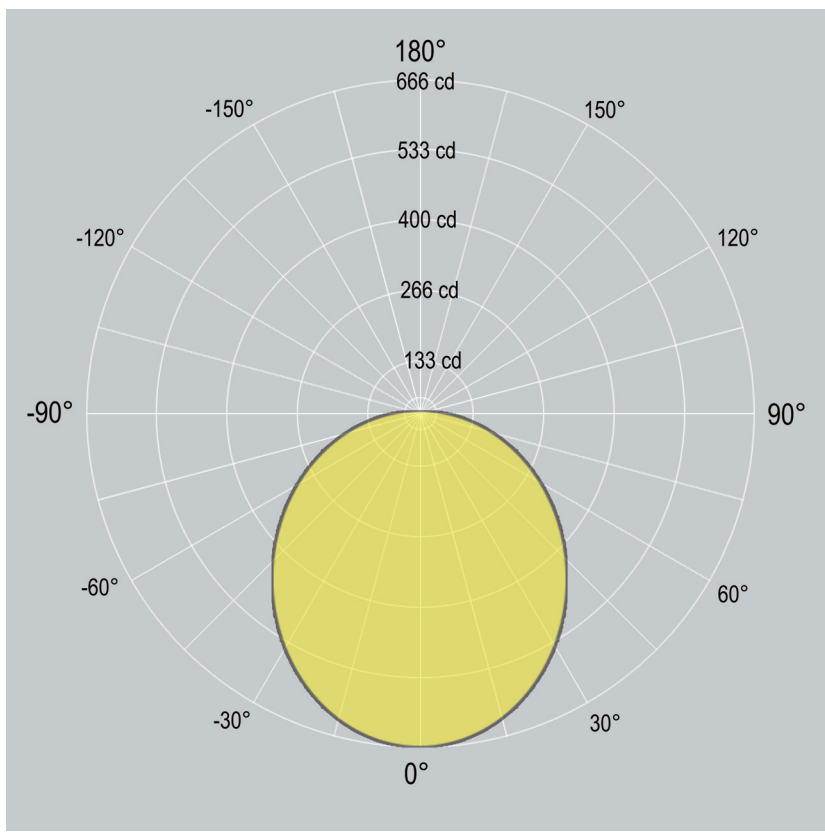

# FIVE BOW RECESSED BURIED LENS FBRTB

# ZALITE


Recessed with Trim

## 1. Base Model

FBRTB

Recessed

FBRTB  
Recessed



## 2. Run Length

Enter total linear length, (example: 6M)

## 3. Lamping

STD - **xxxxK** (example: STD-4000K)

Standard Output, LED 20W/M 1750 delivered lumen, 74 lm/W

HI - **xxxxK** (example: HI-4000K)

High Output, LED 30W/M 2450 delivered lumen, 70 lm/W

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - **xxxxK**

Additional LED Options

Constant Voltage (for custom lengths) 24/12VDC

Contact factory for detail

TW

Tunable White (2700K - 6500K)

Contact factory for detail

RGBW

RGB+WHITE - 24/12VDC

Contact factory for detail

## 4. Driver

0/1-10V

0/1-10V dimming

DALI

DALI dimming

DMX

DMX dimming

NONDIM

Non-dimmable

OTHER

(Consult factory for options)

## 5. Finish

AL

Standard, natural aluminum

BK

Black powdercoat

WH

White powdercoat

Custom

Custom Color

## 6. Additional options

EM

1.5 hour Emergency Kit

MS

Motion sensor

OTHER

Contact Factory

# FIVE BOW RECESSED BURIED LENS FBRTB

Recessed with Trim

# ZALITE

---

## Housing

100% recyclable, extruded architectural grade T6063 aluminum

---

## Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.  
Consult factory for options.

---

## Options

### Mitered Corners


Consult factory for mitered corner angle options.

---

## Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Custom powdercoat options also available.



Mitered Corners




WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom/\_\_\_\_



ISO 9001:2015