


IPL1.5WGID

Water protected

Wall Grazer Direct / Indirect

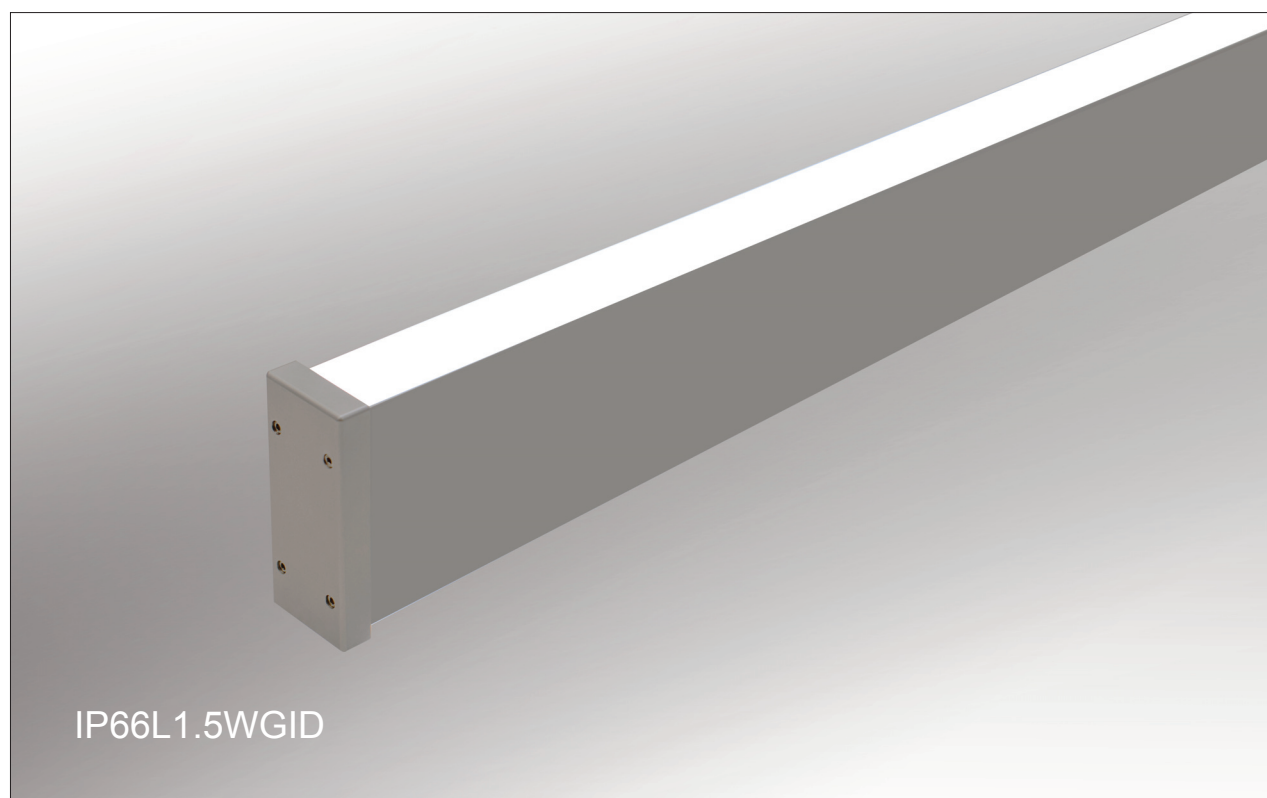


IPL1.5WGID

Wall Grazer Direct / Indirect


ZALITE

Dimensions

IP66L1.5WGID
with End Cap

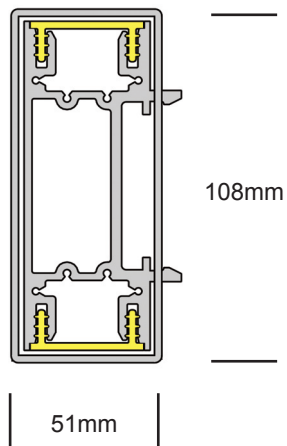

Distribution

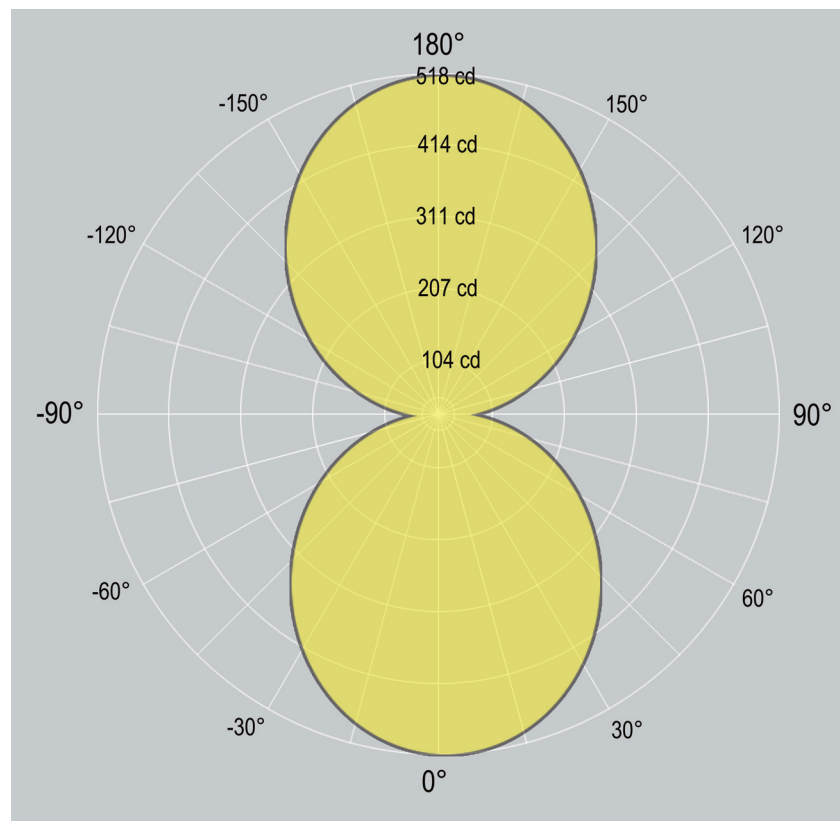

IPL1.5WGID

Wall Grazer Direct / Indirect




1. Base Model

IPL1.5WGID

Wall Grazer Direct / Indirect- IP66

IPL1.5WGID
Wall Grazer Direct/Indirect



2. Run Length

xxxM

1.5M maximum per single length
Sererate fixtures can be joined end to end.

3. LED Lamping

STD - xxxxK (example: STD-4000K)

Standard Output, LED 2X20W/M 2850 delivered lumen, 64 lm/W

HI - xxxxK (example: HI-4000K)

High Output, LED 30W/M 4250 delivered lumen, 61 lm/W

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - xxxxK

Additional LED Options

Constant Voltage (for custom lengths) 24/12VDC

Contact factory for detail

TW

Tunable White (2700K - 6500K)

Contact factory for detail

RGBW

RGB+WHITE - 24/12VDC

Contact factory for detail

4. Driver

0/1-10V

0/1-10V dimming

DALI

DALI dimming

NONDIM

Non-dimmable

OTHER

(Consult factory for options)

5. Finish

AL

Standard, natural aluminum

BK

Black powdercoat

WH

White powdercoat

Custom / ____

Custom powdercoat

6. Additional options

EM

1.5 hour Emergency Kit

MS

Motion sensor

Others

Contact factory

IPL1.5WGID

Wall Grazer Direct / Indirect

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish


Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.
White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015