
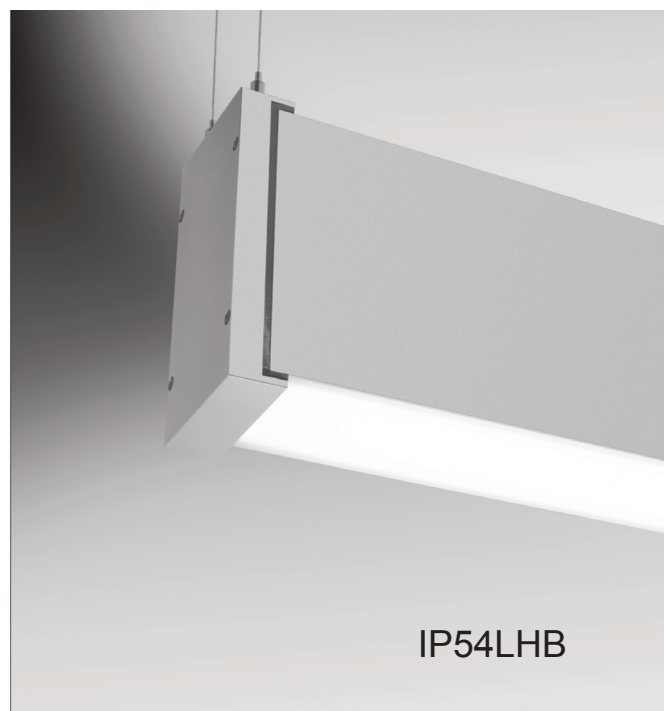


IP66LHB

IP54LHB

Water protected - Indirect/Direct

Suspended
Wall

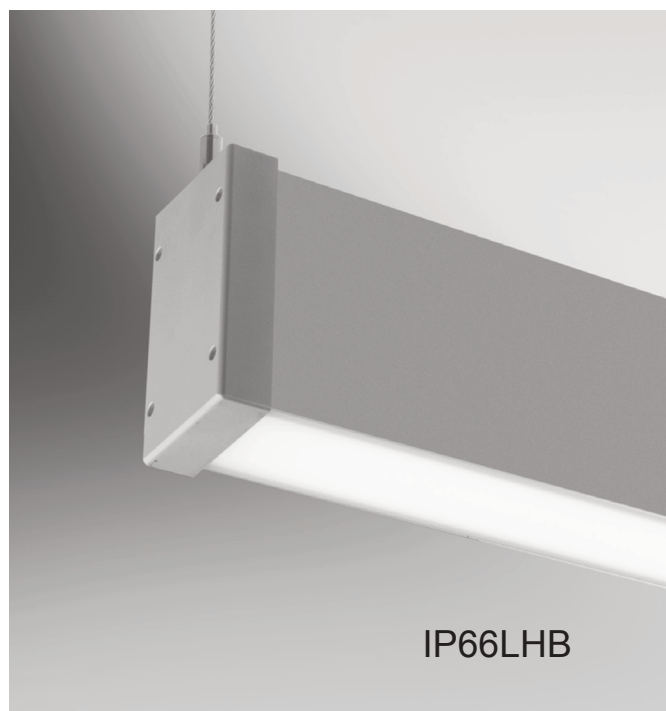


IP66LHB & IP54LHB


Indirect / Direct - Suspended, Wall Mounted



Dimensions

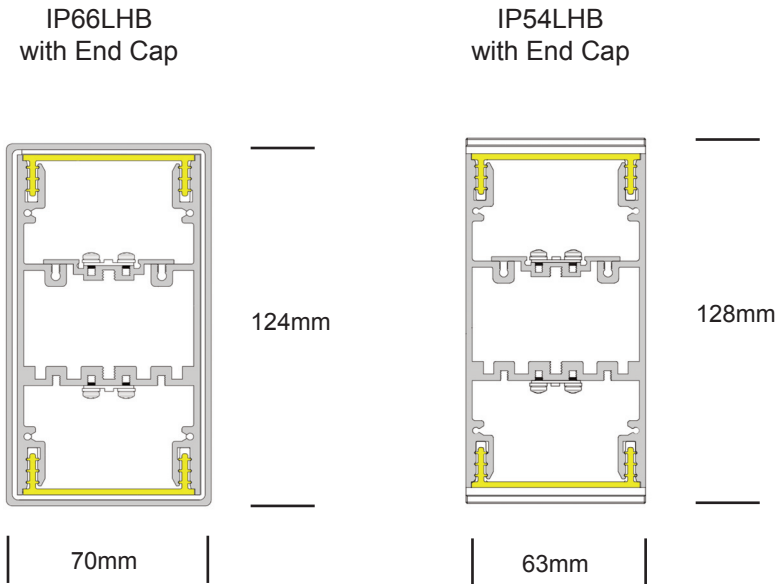

Distribution

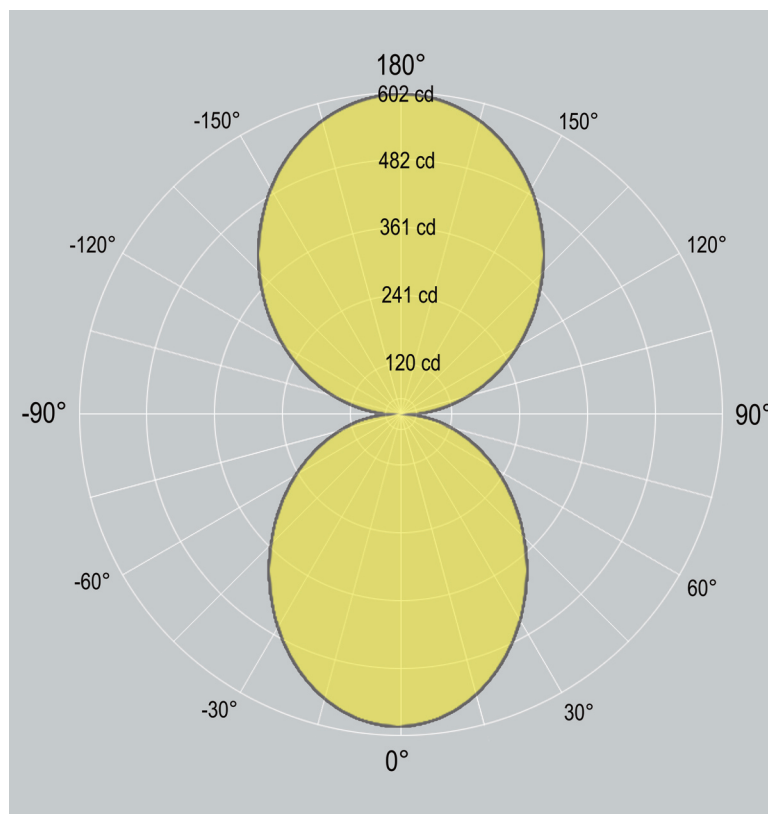

IP66LHB & IP54LHB


Indirect / Direct - Suspended, Wall Mounted




1. Base Model

IP66LHB-S	Suspended - IP66
IP66LHB-WM	Wall Mount - IP66
IP54LHB-S	Suspended - IP54
IP54LHB-WM	Wall Mount - IP54

IP66LHB-S & IP54LHB-S
Suspended



IP66LHB-WM & IP54LHB-WM
Wall Mount



2. Run Length

xxxM	1.5M maximum per single length Separate fixtures can be joined end to end.
------	---

3. LED Lamping - Indirect and Direct

STD - xxxK (example: STD-4000K)	Standard Output, LED 20W/M 3150 delivered lumen, 67 lm/W
HI - xxxK (example: HI-4000K)	High Output, LED 30W/M 4450 delivered lumen, 64 lm/W
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
	Additional LED Options
CV - xxxK	Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail
TW	Tunable White (2700K - 6500K) Contact factory for detail
RGBW	RGB+WHITE - 24/12VDC Contact factory for detail

4. Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom / ____	Custom powdercoat

6. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

IP66LHB & IP54LHB

Indirect / Direct - Suspended, Wall Mounted

ZALITE

Housing


100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish


Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.
White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015