




IPLSL2.5-S-1000-STR-STD-EXT-AL

Features


- IP66 water proof design for long run linear fixture
- Rolled lens presents seamless continuous light
- Built-in driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting


- Suspended, surface, wall



Dimensions



Distributions

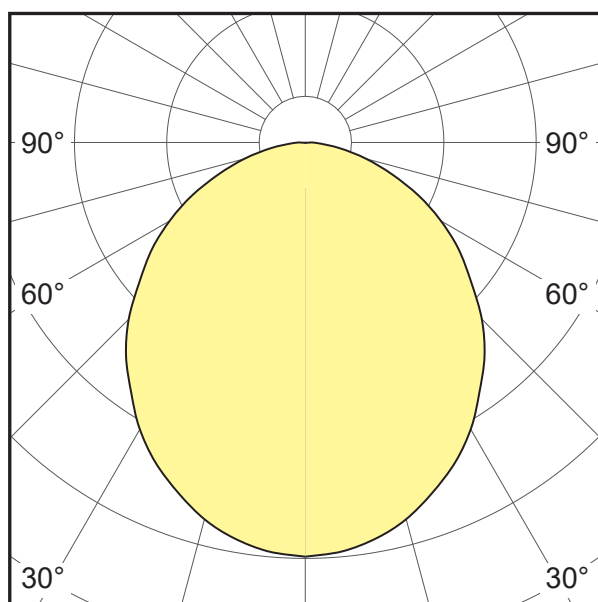

Ordering Info

1. BASIC MODEL

IPLSL2.5-S	Suspended - direct
IPLSL2.5-SM	Surface mount - direct
IPLSL2.5-WM	Wall mount / back mount

2. SIZE AND SHAPE

xxxxmm - STR	Straight - specify individual or continuous run length in mm
--------------	--

3. LED LAMPING - DIRECT LIGHT

LOW - xxxxK	Linear LED strip, low output, LED 10W/M
MED - xxxxK	Linear LED strip, medium output, LED 15W/M
STD - xxxxK	Linear LED strip, standard output, LED 20W/M

Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.

See page6 for information of LED lamping output.

4. LENS - DIRECT LIGHT


EXT	Opal lens
PRI	Prismatic lens

5. DRIVER (REMOTE ONLY)


STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options

6. SUSPENSION MOUNT CANOPY

RC	Canopy in round shape - suspended only
SC	Canopy in square shape - suspended only

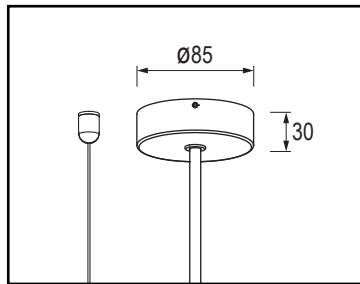

Round canopy

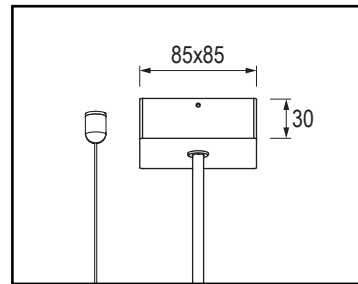


Square canopy

7. FINISH


BK	Matt black powercoat
WH	Matt white powercoat
SG	Silver grey powercoat
CF	Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom


8. OPTIONAL ADD-ONS

EM	1.5 hour emergency kit (remote only)
SS	PIR sensor
OTHERS	Consult factory for options

SPECIFICATION DETAILS

IP66 SEAMLESS LINEAR LUMINAIRE

This seamless linear waterproof luminaire integrates with aluminum housing, shadowless LED modules and rolled lens. Thanks to the IP66 built-in LED modules, the luminaire's housing length can be infinitely extended. The modular design facilitates convenient installation by breaking down complex systems into standardized, pre-engineered units that are easily assembled on-site.

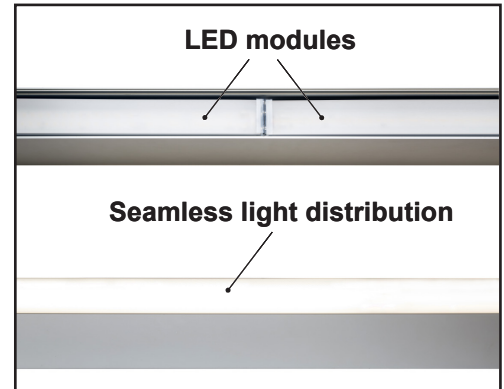


ROLLED LENS

The optically engineered rolled lens provides smooth, uniform and seamless illumination for linear lengths of 30 meters while dynamically controlling output and reducing glare. The rolled lens rolls out and snaps into the housing profile for easy installation. The opal lens with smooth surface are perfectly for outdoor application, while the prismatic lens delivering an uniform and glare-free illumination experience for wet location indoor.



WALL WASHER BRACKET

An adjustable bracket is designed for the wall mounted option. The adjustable angle design for wall washer brackets allows for precise control. There're 11 different wall wash angles available to customization of lighting for achieving desired aesthetics and functionality.

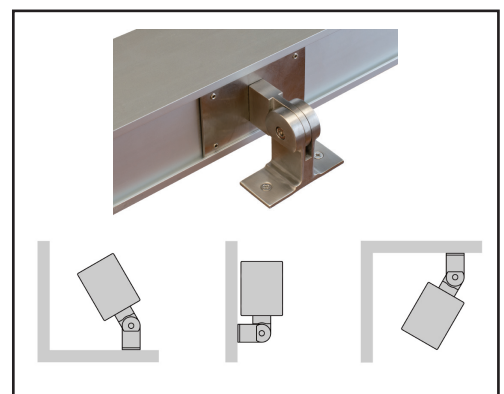


IP66 Linear Seamless 2.5- IPLSL2.5

ZALITE

Suspended, Surface, Wall

SLIDED SUSPENSION KIT

The fixture is designed with slided suspension kit for suspended mounting. The slided suspension kit provides flexible and convenient installation in field. It's available to change the position and quantity of suspension kits when the ceiling layout is changed during installation.

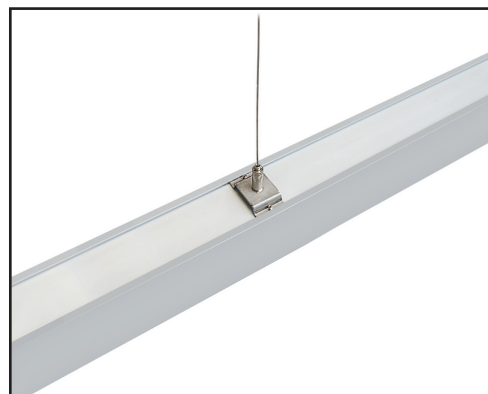

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
IPLSL2.5-LOW-3000K	574	12	80 90	2700K 3000K 3500K 4000K 5000K 6500K	Opal lens
IPLSL2.5-LOW-4000K	608	12			Opal lens
IPLSL2.5-MED-3000K	796	16			Opal lens
IPLSL2.5-MED-4000K	843	16			Opal lens
IPLSL2.5-STD-3000K	1086	23			Opal lens
IPLSL2.5-STD-4000K	1149	23			Opal lens

Note: Performance data is based on a connected-load photometric test of 1 meter fixture output with different output with 90 CRI at 4000K using a non-dimmable driver. Data values for all other outputs are extrapolations.



More information and data,
please visit:
www.zalite.cn

V1.0_2025-05