

---

## KELLY Pendant & Ceiling

Suspended  
Surface (direct only)



Glass Housing



Aluminum Housing  
(High Efficiency White Painting in side)

# KELLY Pendant & Ceiling

Suspended, Surface (direct only)

# ZALITE




# KELLY Pendant & Ceiling

Suspended, Surface (direct only)

# ZALITE

## Dimensions


---

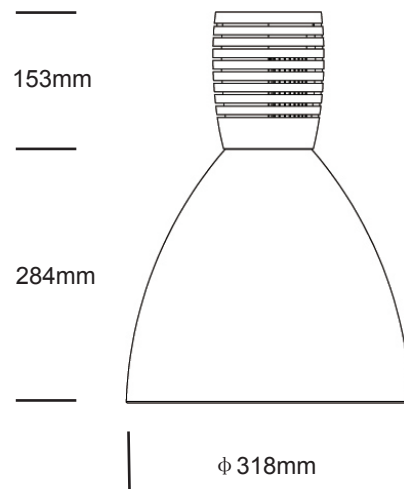


## Distribution

---

### Glass Housing

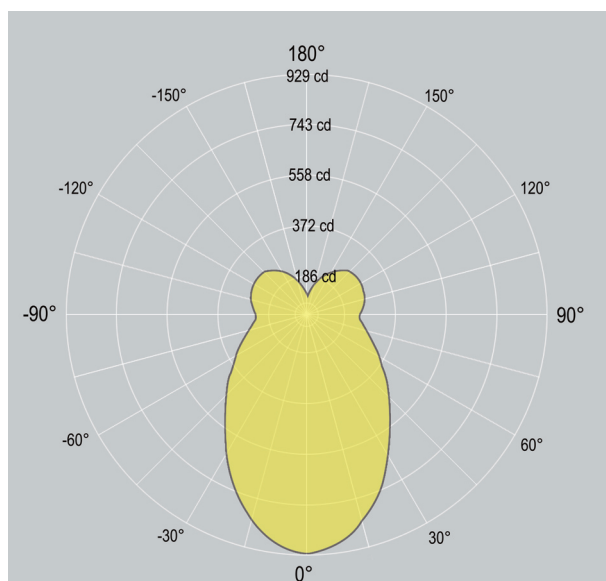

### Aluminum Housing

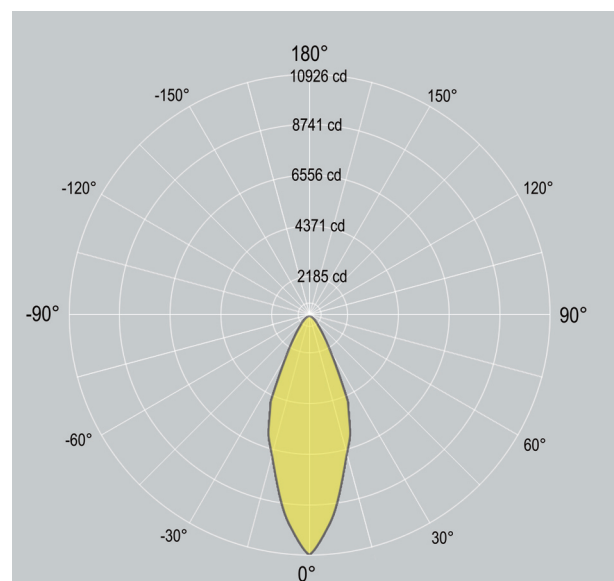

# KELLY Pendant & Ceiling

Suspended, Surface (direct only)

# ZALITE


## 1. MODEL

---

KP-GLASS	Kelly Pendant - Glass housing
KP-AL	Kelly Pendant - Aluminum housing
KC-GLASS	Kelly Ceiling - Glass housing
KC-AL	Kelly Ceiling - Aluminum housing



Pendant



Ceiling

## 2. Lamping

---

STD - <b>xxxxK</b>	Standard Output, 40W, 4300lm for AL housing, 107lm/W @ 3500K
HI - <b>xxxxK</b>	High Output (AL Housing only), 60W, 5695lm, 95 lm/W @ 3500K
	CCT: 3000K 3500K 4000K

## 3. Driver

---

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

## 4. Finish

---

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

## 5. Additional options

---

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

# KELLY Pendant & Ceiling

Suspended, Surface (direct only)

# ZALITE

---

## Housing

100% recyclable, extruded architectural grade T6063 aluminum

---

## Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.  
Consult factory for options.

---

## Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / \_\_\_\_

Default canopy finish  
is to match fitting color,  
unless otherwise  
specified



ISO 9001:2015