
LIGHT CHANNEL 6 – LC6

Retractable spot system

Suspended
Surface Mount




LIGHT CHANNEL 6 — LC6

Suspended, Surface Mount


ZALITE

Dimensions

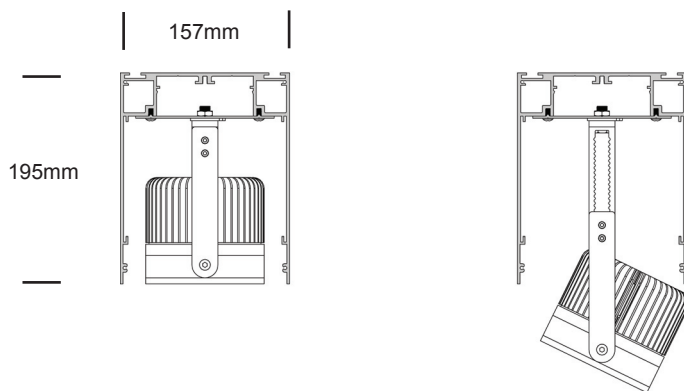

Distribution

25W Spot 38 degree beam angle

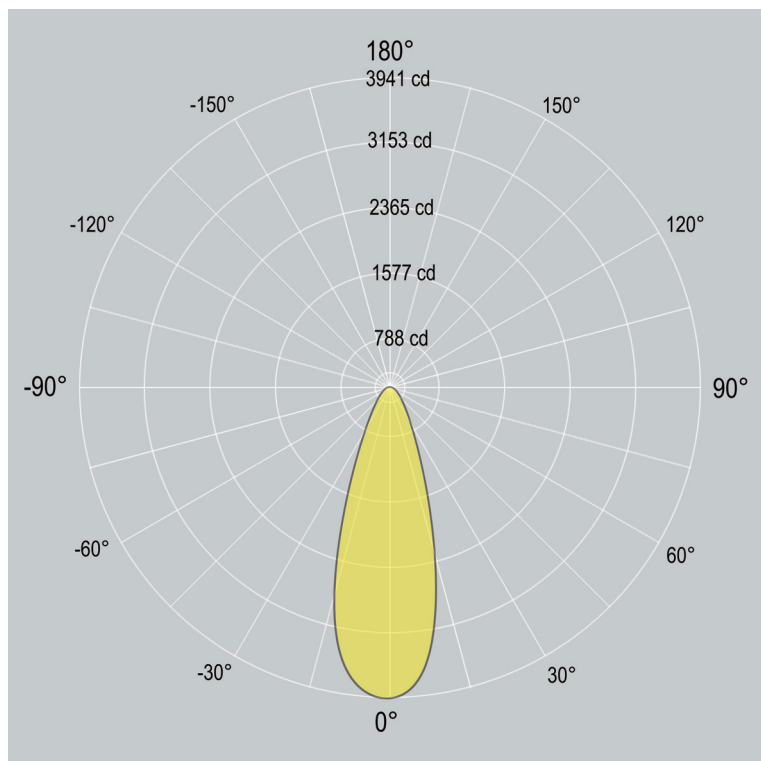


LIGHT CHANNEL 6 — LC6

Suspended, Surface Mount



1. MODEL

LC6-S	Suspended
LC6-SM	Surface Mount

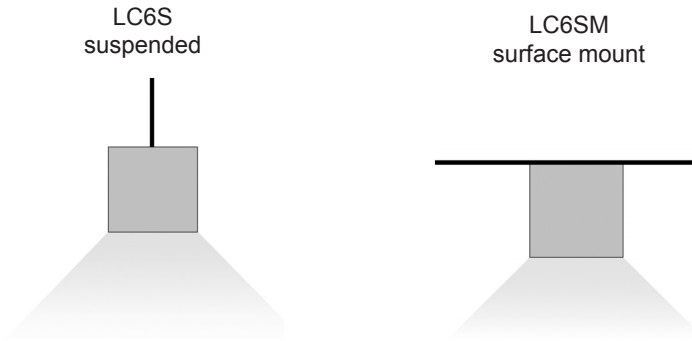

2. RUN LENGTH

xxxx mm

3. QUANTITY of SPOTS

xxx SPOTS

4. LED SPECIFICATION

- D110/40 - 18W - 15°
- D110/40 - 18W - 24°
- D110/40 - 18W - 38°
- D110/40 - 18W - 48°

- D110/40 - 26W - 15°
- D110/40 - 26W - 24°
- D110/40 - 26W - 38°
- D110/40 - 26W - 48°

- D110/60 - 38W - 15°
- D110/60 - 38W - 24°
- D110/60 - 38W - 38°
- D110/60 - 38W - 48°

- D110/60 - 49W - 15°
- D110/60 - 49W - 24°
- D110/60 - 49W - 38°
- D110/60 - 49W - 48°

5. CCT

- 3K - 3000K
- 4K - 4000K

		• D110/40 SPOT - 18W & 26W 110mm Diameter base / 40mm tall heat sink							
		*DELIVERED LUMENS							
D110/40 - 18 WATTS				D110/40 - 26 WATTS					
CITIZEN GEN 6 - CLU038-1206C4				CITIZEN GEN 6 - CLU038-1206C4					
500mA				700mA					
15° BEAM	24° BEAM	38° BEAM	48° BEAM	15° BEAM	24° BEAM	38° BEAM	48° BEAM		
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*2552 lm	*2618 lm	*2466 lm	*2531 lm	*2353 lm	*2414 lm	*2098 lm	*2153 lm	*3460 lm	*3550 lm
142 lm/W	145 lm/W	137 lm/W	141 lm/W	131 lm/W	134 lm/W	116 lm/W	120 lm/W	133 lm/W	137 lm/W
								*3345 lm	*3432 lm
								*3191 lm	*3274 lm
								*2845 lm	*2919 lm

		• D110/60 SPOT - 38W & 49W 110mm Diameter base / 60mm tall heat sink							
		*DELIVERED LUMENS							
D110/60 - 38 WATTS				D110/60 - 49 WATTS					
CITIZEN GEN 6 - CLU038-1206C4				CITIZEN GEN 6 - CLU038-1206C4					
1000mA				1250mA					
15° BEAM	24° BEAM	38° BEAM	48° BEAM	15° BEAM	24° BEAM	38° BEAM	48° BEAM		
LOR 90%	LOR 87%	LOR 83%	LOR 74%	LOR 90%	LOR 87%	LOR 83%	LOR 74%		
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*4727 lm	*4849 lm	*4569 lm	*4687 lm	*4359 lm	*4472 lm	*3886 lm	*3987 lm	*5840 lm	*5853 lm
124 lm/W	128 lm/W	120 lm/W	123 lm/W	115 lm/W	118 lm/W	102 lm/W	105 lm/W	119 lm/W	120 lm/W
								*5645 lm	*5658 lm
								*5386 lm	*5391 lm
								*4802 lm	*4812 lm

LIGHT CHANNEL 6 — LC6

Suspended, Surface Mount

ZALITE

6. Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

7. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

8. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHT CHANNEL 6 — LC6

Suspended, Surface Mount

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.


Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




Suspension & Power



Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015