


LIGHT CHANNEL 6 RECESSED

LCR6T & LCR6

Recessed - retractable spot system

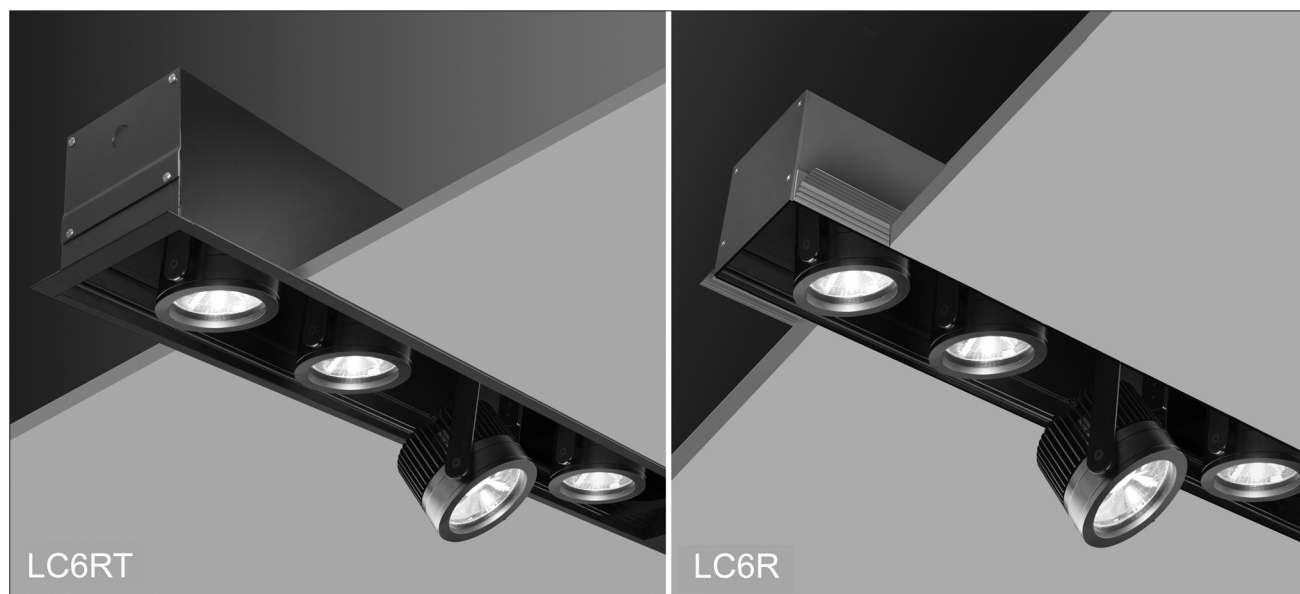


LIGHT CHANNEL 6 RECESSED

LCR6 & LCR6T


Recessed

**LIGHT
FORMS**

Dimensions

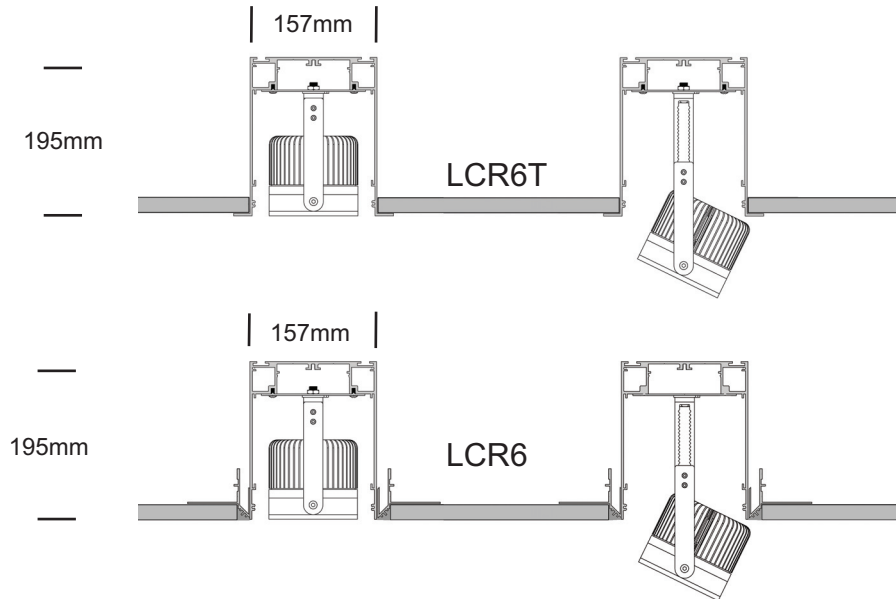

Distribution

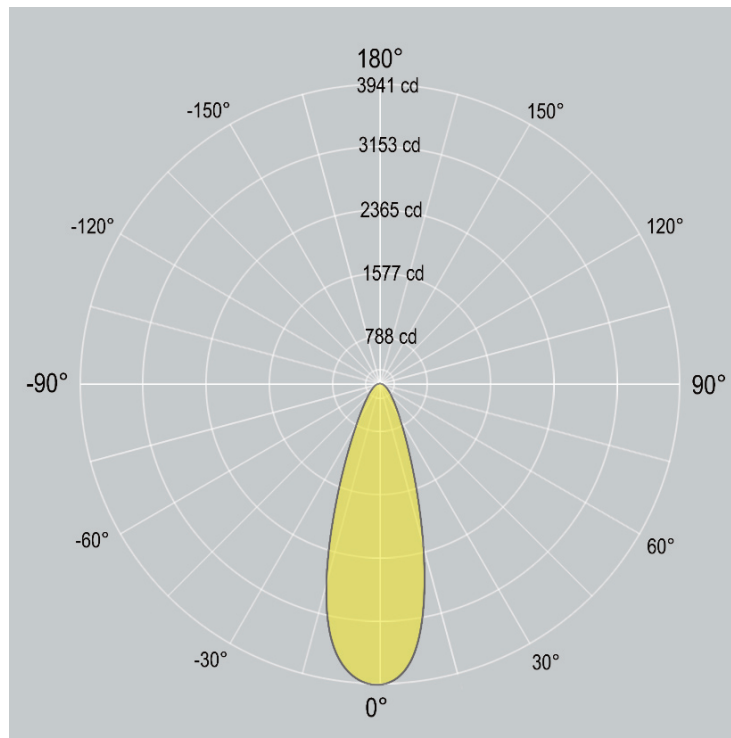

LIGHT CHANNEL 6 RECESSED

LCR6 & LCR6T


Recessed

LIGHT FORMS

1. MODEL

| | |
|-------|----------------------|
| LCR6 | Recessed (Trimless) |
| LCR6T | Recessed (with Trim) |

LCR6 & LCR6T
Recessed

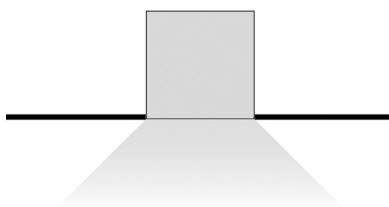

2. RUN LENGTH

xxxx mm enter over-all length (...with trim is ordering LCR6T)

3. QUANTITY of SPOTS

xxx SPOTS

4. LED SPECIFICATION

D110/40 - 18W - 15°

D110/40 - 18W - 24°

D110/40 - 18W - 38°

D110/40 - 18W - 48°

D110/40 - 26W - 15°

D110/40 - 26W - 24°

D110/40 - 26W - 38°

D110/40 - 26W - 48°

D110/60 - 38W - 15°

D110/60 - 38W - 24°

D110/60 - 38W - 38°

D110/60 - 38W - 48°

D110/60 - 49W - 15°

D110/60 - 49W - 24°

D110/60 - 49W - 38°

D110/60 - 49W - 48°

5. CCT

3K - 3000K

4K - 4000K

| | | | | | | | | | | | |
|---|----------|--|----------|---|----------|----------|----------|---|----------|----------|----------|
|  | | <p>• D110/40 SPOT - 18W & 26W</p> <p>110mm Diameter base / 40mm tall heat sink</p> | | *DELIVERED LUMENS | | | | | | | |
| | | | | <p>D110/40 - 18 WATTS</p> <p>CITIZEN GEN 6 - CLU038-1206C4</p> <p>500mA</p> | | | | <p>D110/40 - 26 WATTS</p> <p>CITIZEN GEN 6 - CLU038-1206C4</p> <p>700mA</p> | | | |
| 15° BEAM | 24° BEAM | 38° BEAM | 48° BEAM | 15° BEAM | 24° BEAM | 38° BEAM | 48° BEAM | 3000K | 4000K | 3000K | 4000K |
| *2552 lm | *2618 lm | *2466 lm | *2531 lm | *2353 lm | *2414 lm | *2098 lm | *2153 lm | *3460 lm | *3550 lm | *3345 lm | *3432 lm |
| 142 lm/W | 145 lm/W | 137 lm/W | 141 lm/W | 131 lm/W | 134 lm/W | 116 lm/W | 120 lm/W | 133 lm/W | 137 lm/W | 129 lm/W | 132 lm/W |
|  | | <p>• D110/60 SPOT - 38W & 49W</p> <p>110mm Diameter base / 60mm tall heat sink</p> | | *DELIVERED LUMENS | | | | | | | |
| | | | | <p>D110/60 - 38 WATTS</p> <p>CITIZEN GEN 6 - CLU038-1206C4</p> <p>1000mA</p> | | | | <p>D110/60 - 49 WATTS</p> <p>CITIZEN GEN 6 - CLU038-1206C4</p> <p>1250mA</p> | | | |
| 15° BEAM | 24° BEAM | 38° BEAM | 48° BEAM | 15° BEAM | 24° BEAM | 38° BEAM | 48° BEAM | 3000K | 4000K | 3000K | 4000K |
| LOR 90% | LOR 87% | LOR 83% | LOR 74% | LOR 90% | LOR 87% | LOR 83% | LOR 74% | *4727 lm | *4849 lm | *4569 lm | *4687 lm |
| 124 lm/W | 128 lm/W | 120 lm/W | 123 lm/W | 115 lm/W | 118 lm/W | 102 lm/W | 105 lm/W | *5840 lm | *5853 lm | *5645 lm | *5658 lm |
| | | | | | | | | *5386 lm | *5391 lm | *4802 lm | *4812 lm |
| | | | | | | | | 110 lm/W | 110 lm/W | 98 lm/W | 98 lm/W |

LIGHT CHANNEL 6 RECESSED

LCR6 & LCR6T

Recessed

**LIGHT
FORMS**

6. Driver

| | |
|---------|-------------------------------|
| 0/1-10V | 0/1-10V dimming |
| DALI | DALI dimming |
| DMX | DMX dimming |
| NONDIM | Non-dimmable |
| OTHER | (Consult factory for options) |

7. Finish

| | |
|--------|----------------------------|
| AL | Standard, natural aluminum |
| BK | Black powdercoat |
| WH | White powdercoat |
| Custom | Custom Color |

8. Additional options

| | |
|--------|------------------------|
| EM | 1.5 hour Emergency Kit |
| MS | Motion sensor |
| Others | Contact factory |

LIGHT CHANNEL 6 RECESSED

LCR6 & LCR6T

Recessed

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency


Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.
White, Black, and Custom color powdercoat options also available.



WH - WHITE



AL - ALUMINUM



Custom

Default canopy finish is to match fitting color, unless otherwise specified



BK - BLACK



ISO 9001:2015

China

Zhongshan Architectural Lighting Co., Ltd

FL 1-Unit 3, Building A, 9 Fenghuang Road, Torch Development Area, Zhongshan, Guangdong 528437, P.R China

T +86 760 899 370 38
F +86 760 899 370 39
E ckirin@lightforms.com.cn

UK

Light Forms

Unit 7C Boeing Way International Trading Estate Middlesex UB2 5LB

T +44 (0)20 8571 3785
F +44 (0)20 8090 3755
E ask@lightforms.com

India

Architectural Lighting

353/2 Dr Hira Singh Road Civil Lines Ludhiana 141001 Punjab, India

T +91 98 7280 0488
E ajay@lightforms.com