


LIGHTRODS



- LIGHTROD 50 ROUND
- LIGHTROD 70 ROUND
- LIGHTROD 80 ROUND
- LIGHTROD 100 ROUND
- LIGHTROD 70x70 SQUARE

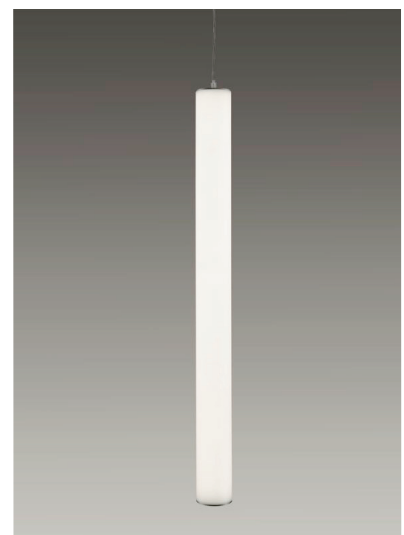

LIGHTRODS

Suspended, Wall Mounted

ZALITE

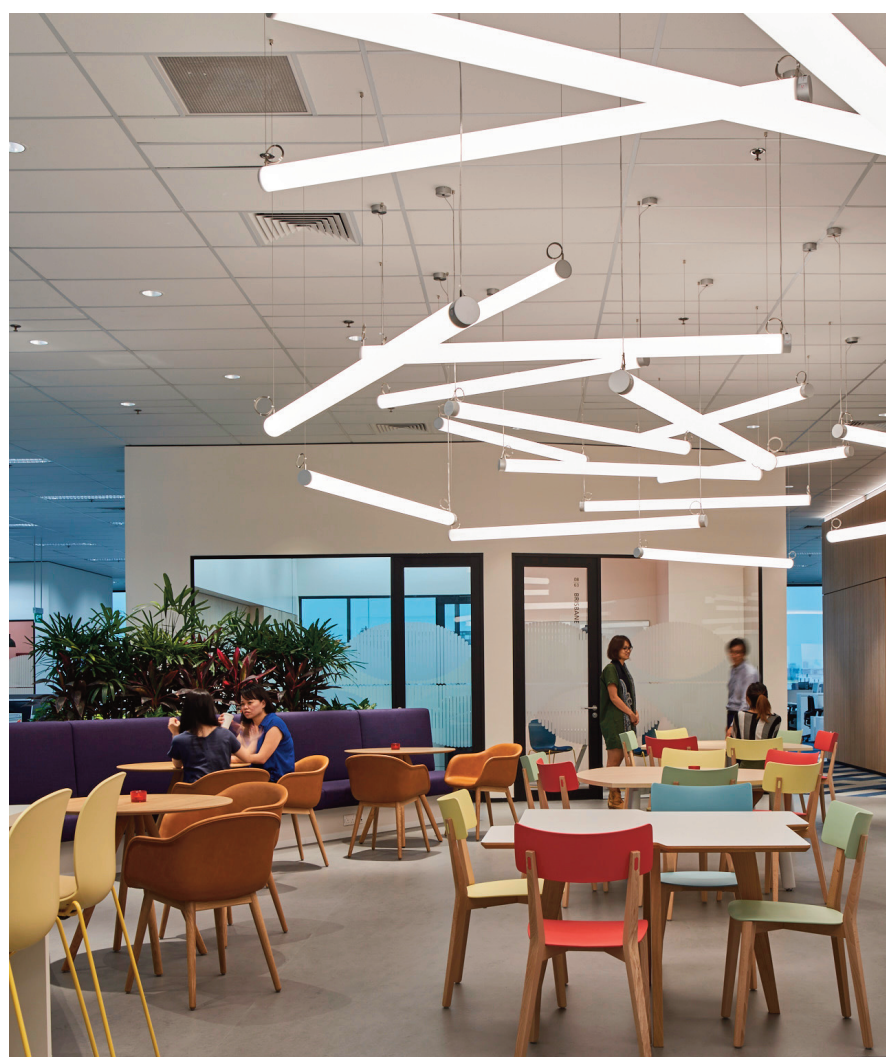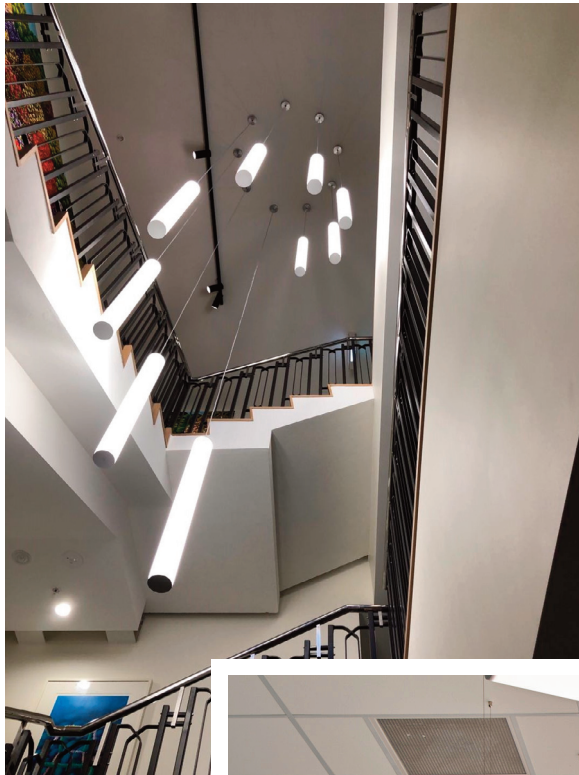


LIGHTRODS

Suspended, Wall Mounted

ZALITE


Dimensions

LIGHTROD50




50 mm

LIGHTROD70

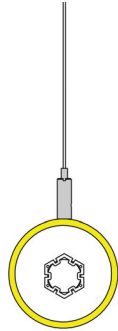


70 mm

LIGHTROD70SQ




70 x 70 mm

LIGHTROD80



80 mm


LIGHTROD100

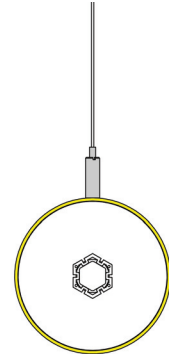


100 mm

Distribution


Lightrod50

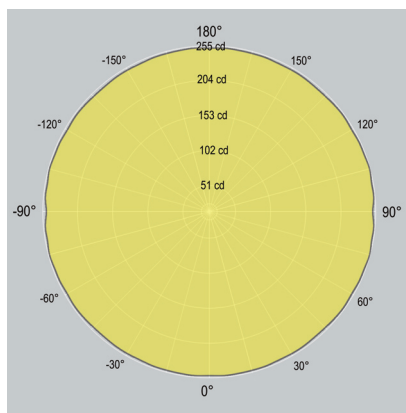


Lightrod70

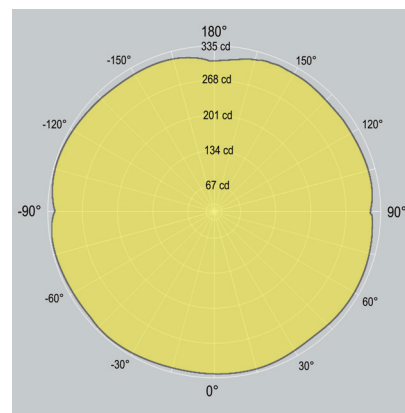

Lightrod80

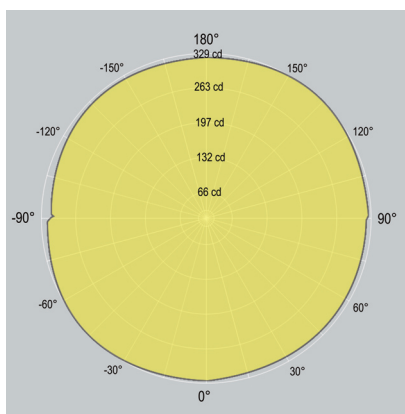

Lightrod100

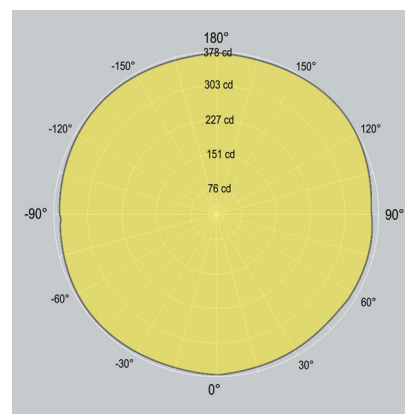

LIGHTRODS

Suspended, Wall Mounted

ZALITE

1. Base Model

LIGHTROD50-HS	Horizontal Suspended - 50mm round acrylic tube
LIGHTROD50-VS	Vertical Suspended - 50mm round acrylic tube
LIGHTROD50-WM	Wall Mounted - 50mm round acrylic tube
LIGHTROD70-HS	Horizontal Suspended - 70mm round acrylic tube
LIGHTROD70-VS	Vertical Suspended - 70mm round acrylic tube
LIGHTROD70-WM	Wall Mounted - 70mm round acrylic tube
LIGHTROD80-HS	Horizontal Suspended - 80mm round acrylic tube
LIGHTROD80-VS	Vertical Suspended - 80mm round acrylic tube
LIGHTROD80-WM	Wall Mounted - 80mm round acrylic tube
LIGHTROD100-HS	Horizontal Suspended - 100mm round acrylic tube
LIGHTROD100-VS	Vertical Suspended - 100mm round acrylic tube
LIGHTROD100-WM	Wall Mounted - 100mm round acrylic tube
LIGHTROD70SQ-HS	Horizontal Suspended - 70mm square acrylic tube
LIGHTROD70SQ-VS	Vertical Suspended - 70mm square acrylic tube
LIGHTROD70SQ-WM	Wall Mounted - 70mm square acrylic tube

2. Run Length

xxmm

Specify length in mm. Actual length may vary slightly.
Max single length is 1.5M



3. LED Lamping

STD - xxxK	Standard Output (CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K)
	LIGHTROD50 - 2100 delivered lm/M, 25W/M, 84lm/w @ 4000K
	LIGHTROD70 - 3060 delivered lm/M, 25W/M, 121lm/w @ 4000K
	LIGHTROD80 - 3074 delivered lm/M, 25W/M, 118lm/w @ 4000K
	LIGHTROD1000 - 3500 delivered lm/M, 25W/M, 135lm/w @ 4000K
	LIGHTROD70SQ - 3275 delivered lm/M, 25W/M, 127lm/w @ 4000K

4. LED Driver (remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish (end caps and joiners)

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
CUSTOM	Specify CUSTOM powdercoat

6. Additional options (remote only)

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHTRODS

Suspended, Wall Mounted

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

End Cap & Canopy Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White Black, custom powdercoat options are available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



CUSTOM/ _____

Default canopy finish is to match fitting color, unless otherwise specified



BK - BLACK



ISO 9001:2015