

LIGHTPLANE 11 – LP11

TWIN CHANNEL SPOTS

Suspended




LIGHTPLANE 11 — LP11

Suspended


ZALITE

Dimensions

CHANNEL MADE BY LPL2.5 PROFILE

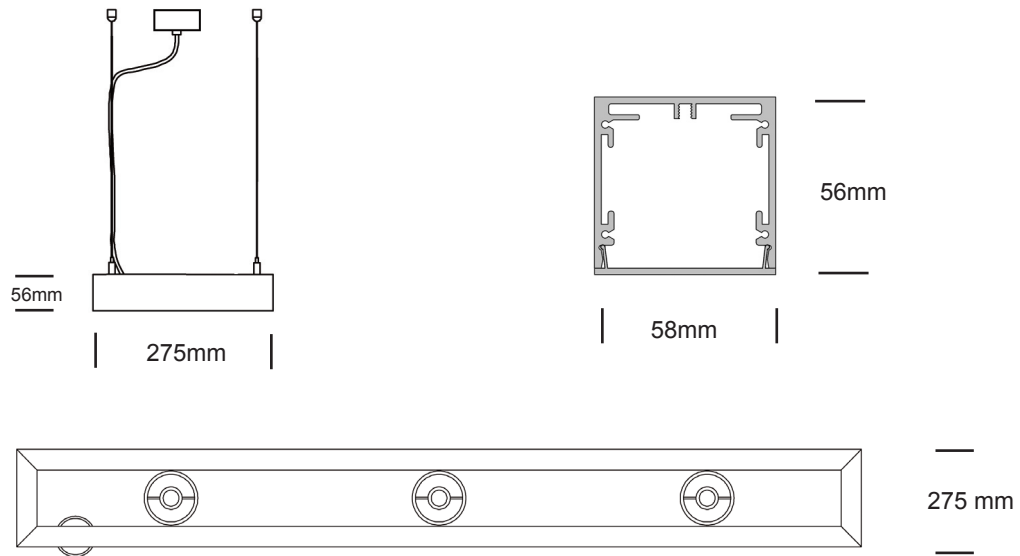

Distribution

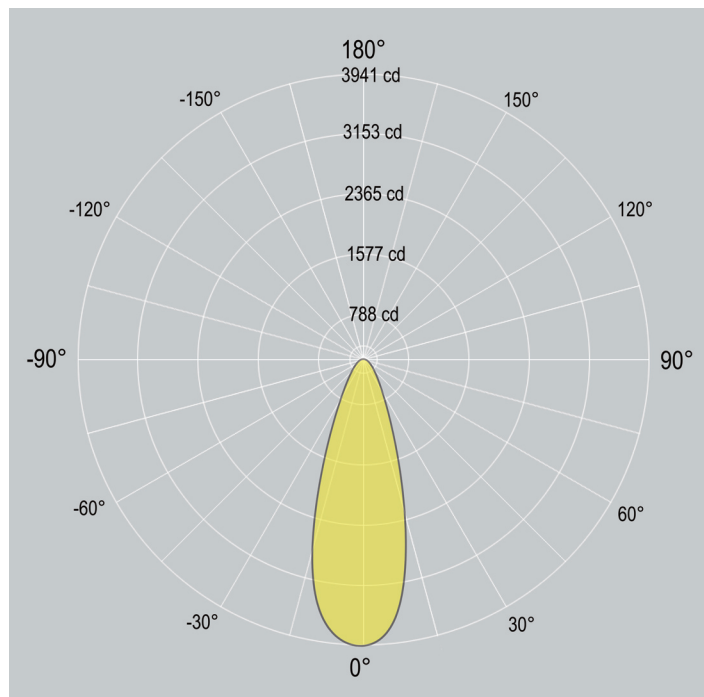

LIGHTPLANE 11 — LP11

ZALITE

Suspended

1. MODEL

LP11

Suspended

2. RUN LENGTH

xxxx mm

3. QUANTITY of SPOTS

xxx SPOTS

4. LED SPECIFICATION

D50/60 - 7W - 25°

D50/60 - 7W - 40°

D50/80 - 13W - 25°

D50/80 - 13W - 40°

D85/60 - 13W - 25°

D85/60 - 13W - 40°

D85/60 - 13W - 60°

D85/60 - 19W - 25°

D85/60 - 19W - 40°

D85/60 - 19W - 60°

D110/40 - 18W - 15°

D110/40 - 18W - 24°

D110/40 - 18W - 38°

D110/40 - 18W - 48°

D110/40 - 26W - 15°

D110/40 - 26W - 24°

D110/40 - 26W - 38°

D110/40 - 26W - 48°

D110/60 - 38W - 15°

D110/60 - 38W - 24°

D110/60 - 38W - 38°

D110/60 - 38W - 48°

D110/60 - 49W - 15°

D110/60 - 49W - 24°


D110/60 - 49W - 38°

D110/60 - 49W - 48°

5. CCT

3K - 3000K

4K - 4000K

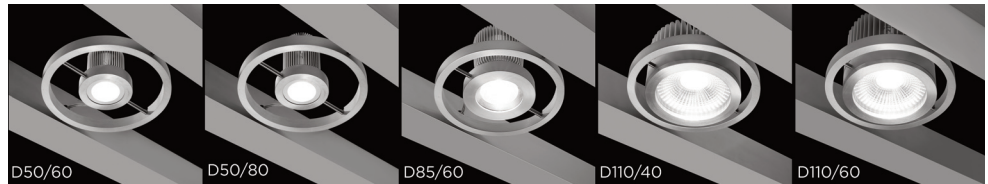

 <ul style="list-style-type: none"> D50/60 SPOT - 7W 50mm Diameter base / 60mm tall heat sink 				 <ul style="list-style-type: none"> D50/80 SPOT - 13W 50mm Diameter base / 80mm tall heat sink 			
*DELIVERED LUMENS				*DELIVERED LUMENS			
D50/60 - 7 WATTS				D50/80 - 13 WATTS			
CITIZEN GEN 6 - CLU028-1204C4				CITIZEN GEN 6 - CLU028-1204C4			
200mA				350mA			
25° BEAM		40° BEAM		25° BEAM		40° BEAM	
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*910 lumens	*934 lumens	*796 lumens	*817 lumens	*1534 lumens	*1575 lumens	*1342 lumens	*1378 lumens
130 lm/W	133 lm/W	114 lm/W	117 lm/W	118 lm/W	121 lm/W	103 lm/W	106 lm/W

 <ul style="list-style-type: none"> D85/60 SPOT - 13W & 19W 85mm Diameter base / 60mm tall heat sink 											
*DELIVERED LUMENS											
D85/60 - 13 WATTS						D85/60 - 19 WATTS					
CITIZEN GEN 6 - CLU028-1204C4						CITIZEN GEN 6 - CLU028-1204C4					
350mA						500mA					
25° BEAM		40° BEAM		60° BEAM		25° BEAM		40° BEAM		60° BEAM	
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*1821 lm	*1870 lm	*1821 lm	*1870 lm	*1591 lm	*1633 lm	*2511 lm	*2577 lm	*2511 lm	*2577 lm	*2194 lm	*2252 lm
140 lm/W	144 lm/W	140 lm/W	144 lm/W	122 lm/W	126 lm/W	132 lm/W	136 lm/W	132 lm/W	136 lm/W	115 lm/W	118 lm/W

 <ul style="list-style-type: none"> D110/40 SPOT - 18W & 26W 110mm Diameter base / 40mm tall heat sink 															
*DELIVERED LUMENS															
D110/40 - 18 WATTS							D110/40 - 26 WATTS								
CITIZEN GEN 6 - CLU038-1206C4							CITIZEN GEN 6 - CLU038-1206C4								
500mA							700mA								
15° BEAM		24° BEAM		38° BEAM		48° BEAM		15° BEAM		24° BEAM		38° BEAM		48° BEAM	
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*2552 lm	*2618 lm	*2466 lm	*2531 lm	*2353 lm	*2414 lm	*2098 lm	*2153 lm	*3460 lm	*3550 lm	*3345 lm	*3432 lm	*3191 lm	*3274 lm	*2845 lm	*2919 lm
142 lm/W	145 lm/W	137 lm/W	141 lm/W	131 lm/W	134 lm/W	116 lm/W	120 lm/W	133 lm/W	137 lm/W	129 lm/W	132 lm/W	123 lm/W	126 lm/W	109 lm/W	112 lm/W

 <ul style="list-style-type: none"> D110/60 SPOT - 38W & 49W 110mm Diameter base / 60mm tall heat sink 															
*DELIVERED LUMENS															
D110/60 - 38 WATTS							D110/60 - 49 WATTS								
CITIZEN GEN 6 - CLU038-1206C4							CITIZEN GEN 6 - CLU038-1206C4								
1000mA							1250mA								
15° BEAM		24° BEAM		38° BEAM		48° BEAM		15° BEAM		24° BEAM		38° BEAM		48° BEAM	
LOR 90%	LOR 87%	LOR 83%	LOR 74%	LOR 90%	LOR 87%	LOR 83%	LOR 74%	LOR 90%	LOR 87%	LOR 83%	LOR 74%	LOR 90%	LOR 87%	LOR 83%	LOR 74%
3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
*4727 lm	*4849 lm	*4569 lm	*4687 lm	*4359 lm	*4472 lm	*3886 lm	*3987 lm	*5840 lm	*5853 lm	*5645 lm	*5658 lm	*5386 lm	*5391 lm	*4802 lm	*4812 lm
124 lm/W	128 lm/W	120 lm/W	123 lm/W	115 lm/W	118 lm/W	102 lm/W	105 lm/W	119 lm/W	120 lm/W	115 lm/W	115 lm/W	110 lm/W	110 lm/W	98 lm/W	98 lm/W

LIGHTPLANE 11 — LP11

ZALITE

Suspended

6. Driver


0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

7. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

8. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

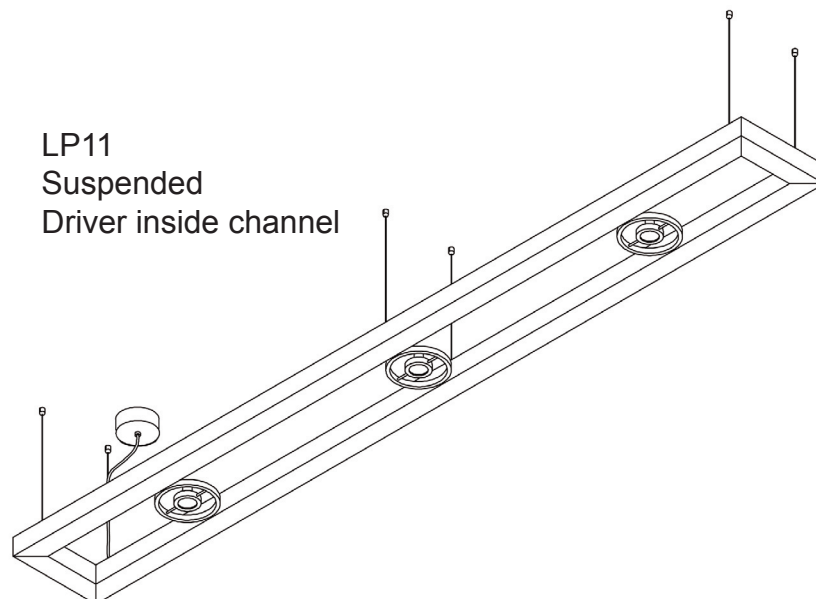

LIGHTPLANE 11 — LP11

Suspended

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.


Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




Suspension & Power



Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015