


CE CB IP20 IK08 RoHS

Features

- Custom curved or straight shapes and configurations
- Remote driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting

- Suspended, surface



Moonring 1 Direct - LPL1M


Suspended, Surface

ZALITE

PHOTOS




Dimensions



LPL1M
Suspended and surface

Distributions

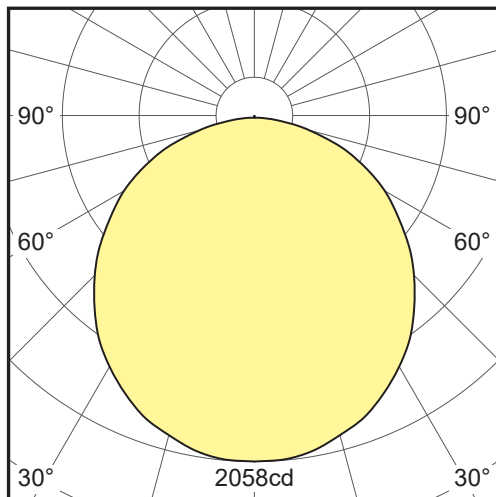

Ordering Info


1. BASIC MODEL

LPL1M-SUS	Suspended
LPL1M-SF	Surface mount


2. SIZE AND SHAPE

xxxxmm - CIRCLE	Circle - specify outside diameter in mm
xxxxmm - HCIRCLE	Half circle - specify outside diameter in mm
xxxxmm - 1/4 ARC	Quarter arc - specify outside diameter in mm
xxxxmm - STR	Straight - specify length in mm
xxxxmm - Special Shape	Radom connection of sectional circle, arc and straight


* Sample configuration diagrams as below.




Circle




Rounded Rectangle




Stadium Oval



Serpentine

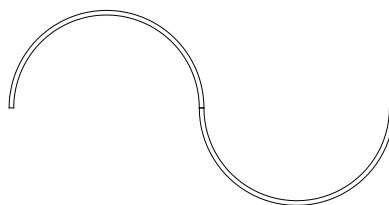

S-Shape

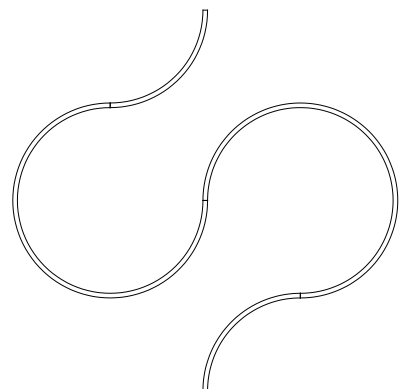

Curve

3. LED LAMPING

LOW - xxxxK	Linear LED strip, low output, LED 10W/M
STD - xxxxK	Linear LED strip, standard output, LED 20W/M
HI - xxxxK	Linear LED strip, high output, LED 30W/M

Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, RGB, TUNE(2700K-6500K). Contact factory for details.


See page 7 for information of LED lamping output.

4. DRIVER


STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options

5. SUSPENSION MOUNT CANOPY


RC	Canopy in round shape - suspended only
SC	Canopy in square shape - suspended only
PS	Powered suspension kits, no canopy- suspended only

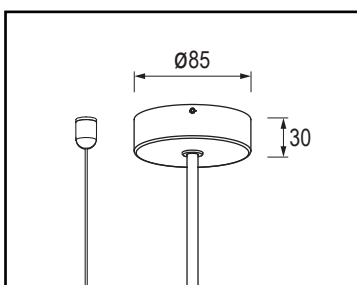

Round canopy

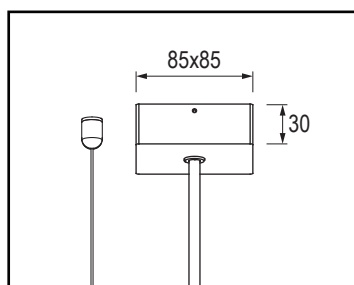

Square canopy

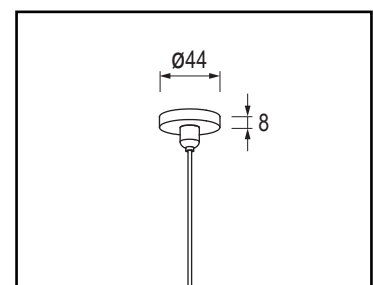

Powered suspension kit

6. FINISH

BK	Matt black powercoat
WH	Matt white powercoat
SG	Silver grey powercoat
CF	Custom finish - RAL or Pantone or other finish options



Matt black



Matt white



Silver grey



Custom

7. OPTIONAL ADD-ONS

EM	1.5 hour emergency kit (remote only)
SS	PIR sensor
OTHERS	Consult factory for options

SPECIFICATION DETAILS

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
D900-LOW	2212	32	80 90	2700K 3000K 3500K 4000K 5000K 6500K	900mm in diameter, 10 watts per meter
D900-STD	4424	64			900mm in diameter, 20 watts per meter
D1200-LOW	3387	49			1200mm in diameter, 10 watts per meter
D1200-STD	6774	98			1200mm in diameter, 20 watts per meter
D1500-LOW	3732	54			1500mm in diameter, 10 watts per meter
D1500-STD	7465	108			1500mm in diameter, 20 watts per meter

Note: Data provided is from a photometric test of ϕ 1.2 meter fixture output with 90CRI at 4000K using a non-dimmable driver.



More information and data,
please visit:
www.zalite.cn

V2.0_2024-10