


MOONRING – LPL1MID

INDIRECT / DIRECT

Suspended

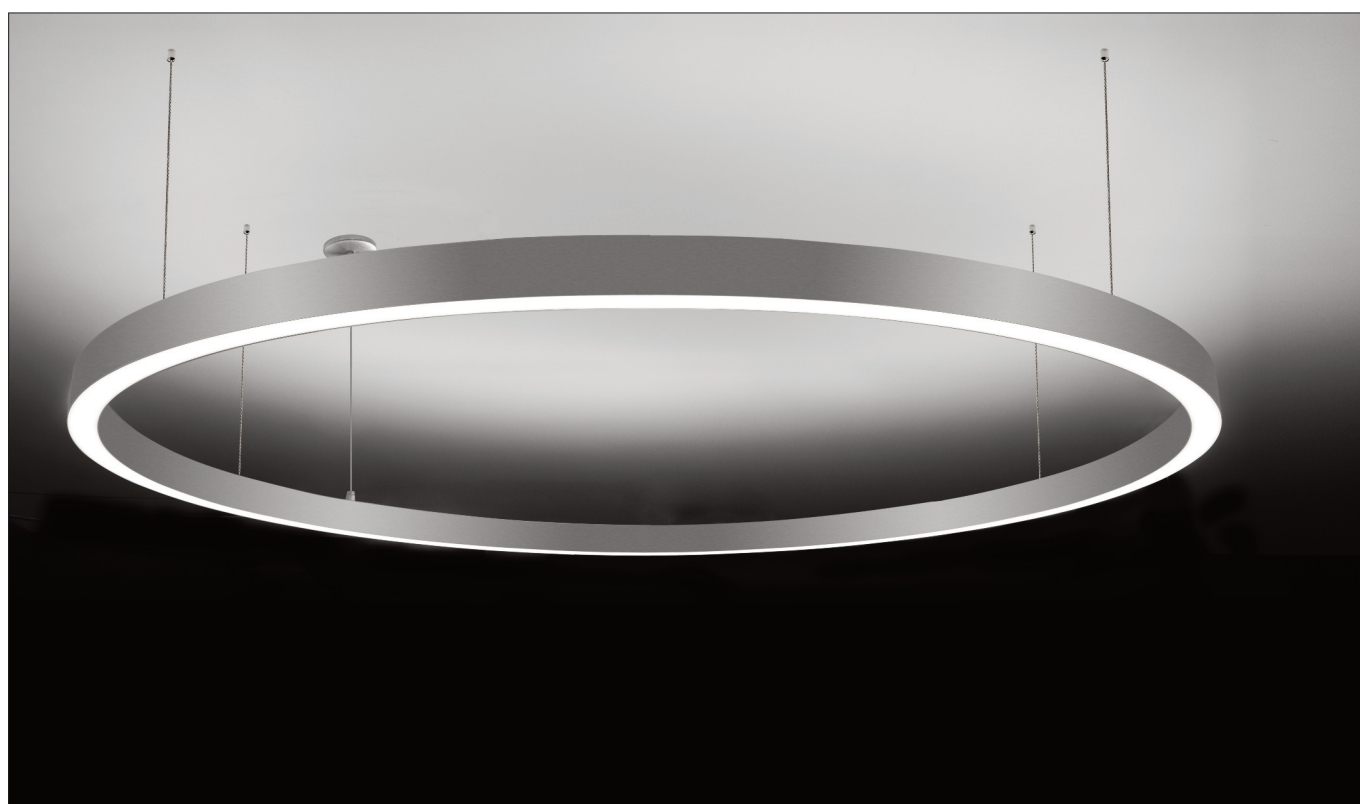

MOONRING – LPL1MID

INDIRECT / DIRECT
Suspended

**LIGHT
FORMS**




MOONRING – LPL1MID


INDIRECT / DIRECT
Suspended

**LIGHT
FORMS**

Dimensions

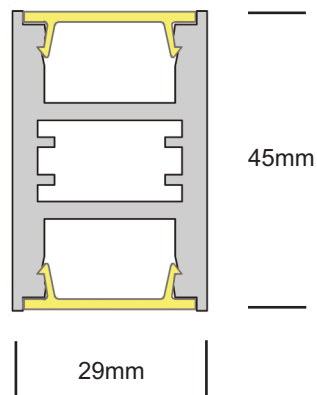

Distribution

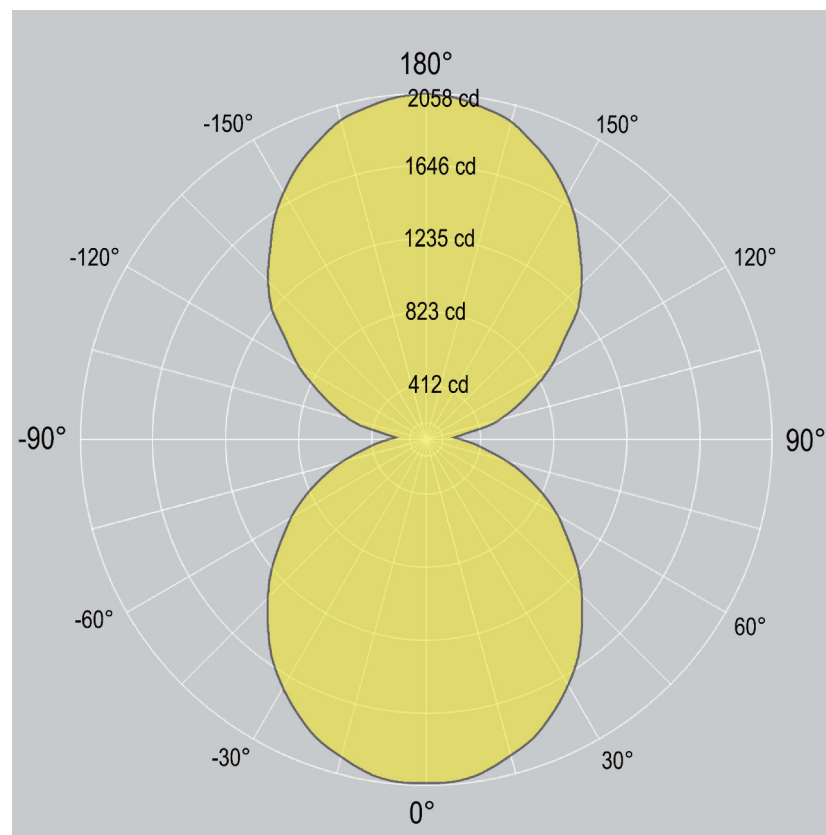

MOONRING – LPL1MID

INDIRECT / DIRECT
Suspended


**LIGHT
FORMS**

1. Base Model

LPL1MID

Suspended - Indirect/Direct

LPL1MID
Suspended Indirect / Direct



2. Outside Diameter and type - (minimum diameter is 600mm)

xxxmm - CIRCLE

Circle - Specify outside diameter in mm

xxxmm - HCIRCLE

Half Circle - Specify outside diameter in mm


xxxmm - 1/4 ARC

Quarter Arc - Specify outside diameter in mm

xxxmm - special shape

Radom connection of - Sectional Circle+Circle+Quarter+Straight



CIRCLE



HALF CIRCLE



1/4 ARC

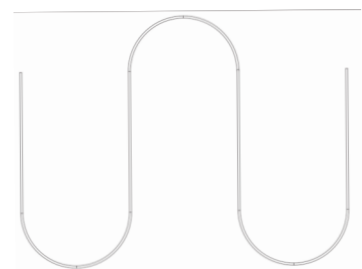

MOONRING – LPL1MID

INDIRECT / DIRECT
Suspended

**LIGHT
FORMS**

3. INDIRECT/DIRECT LED Lamping - STD data shown below is for indirect/direct 1200mm diameter example

STD - **xxxxK** **Standard Output**, LED 2x20W/M 11800 delivered lm/1.2M ring, 67 lm/W @ 4000K

HI - **xxxxK** **High Output**, LED 2x30W/M 16880 delivered lm/1.2M ring, 64 lm/W @ 4000K

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

Additional LED Options

CV **Constant Voltage (for custom lengths) - 12Vdc/24Vdc**

Contact factory for detail

TW **Tunable White (2700K - 6500K)**

Contact factory for detail

RGBW **Standard Output - RGB+WHITE - 24Vdc/12Vdc**

Contact factory for detail

4. LED Driver (remote only)

0/1-10V 0/1-10V dimming

DALI DALI dimming

DMX DMX dimming

NONDIM Non-dimmable

OTHER (Consult factory for options)

5. Finish

SL Silver powdercoat

BK Black powdercoat

WH White powdercoat

Custom Custom Color

6 Additional options - (remote only)

EM 1.5 hour Emergency Kit

MS Motion sensor

Others Contact factory

MOONRING – LPL1MID

INDIRECT / DIRECT
Suspended

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency


Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish

Standard finish is Silver powdercoat.
White, Black, or custom RAL powdercoat options are also available.



Suspension & Power



WH - WHITE



SL - Silver



BK - BLACK



Custom/____

*Default canopy finish
is to match fitting color,
unless otherwise
specified*



ISO 9001:2015

China

Unit 3, Building A
No. 9 Phoenix Road
Torch Development Area
Zhongshan City
Guangdong China 528437

T +86 760 899 370 38
F +86 760 899 370 39
E ckirin@lightforms.com.cn

UK

Unit 7C Boeing Way
International Trading Estate
Middlesex
UB2 5LB

T +44 (0)20 8571 3785
F +44 (0)20 8090 3755
E ask@lightforms.com

India

353/2 Dr Hira Singh Road
Civil Lines
Ludhiana 141001
Punjab, India

T +91 98 7280 0488
E ajay@lightforms.com

Light Forms

Architectural Lighting
www.lightforms.com

Registered in England
No. 6750892
Registered Address
Unit 7C Boeing Way
International Trading Centre
Middlesex, UB2 5LB