




LPL2SS-P-S-1200-STD-STD-AL & LPL2ID-P-S-1200-STD-STD-AL

Features

- Rolled acrylic lens presents seamless continuous light
- Low UGR design
- Direct-indirect distribution (LPL2ID)
- Custom shapes and configurations
- Built-in driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting

- Suspended, surface, wall, recessed

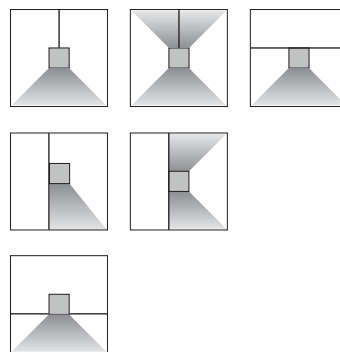

Lightplane Linear 2- LPL2SS PLUS


Suspended, Surface, Wall, Recessed

ZALITE


PHOTOS




Dimensions

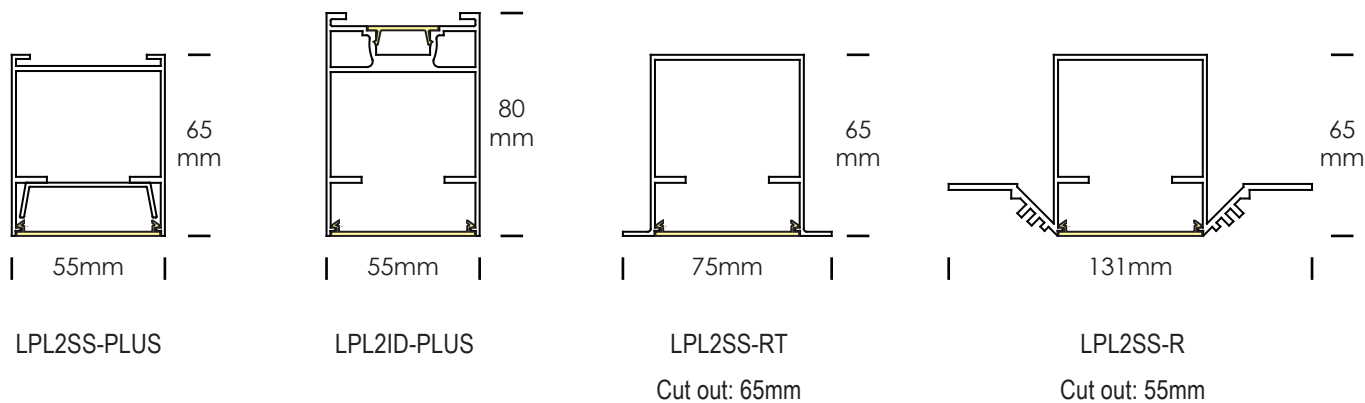

Distributions

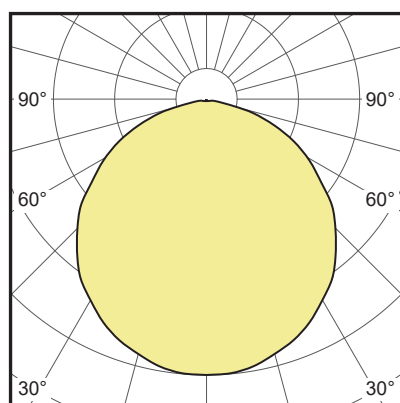

LPL2SS/LPL2SS-RT/LPL2SS-R

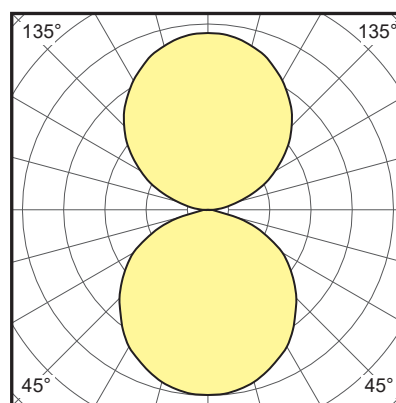

LPL2ID

Ordering Info

1. BASIC MODEL

LPL2SS-P-S	Suspended - direct
LPL2SS-P-SM	Surface mount - direct
LPL2SS-P-WM	Wall mount / back mount - direct / indirect
LPL2ID-P-S	Suspended - direct and indirect
LPL2ID-P-WM	Wall mount - direct and indirect
LPL2SS-RT	Recessed with trim - direct
LPL2SS-R	Trimless recessed - direct

2. SIZE AND SHAPE

xxxxmm - STR	Straight - specify individual or continuous run length in mm
xxxxmm - SQ	Square - specify outside dimension in mm
xxxxmm - REC	Rectangle - specify outside dimension in mm
xxxxmm - TEE	T- Shape - specify length in mm
xxxxmm - Special Shape	Radom connection of sectional straight

* Sample configuration diagrams as below.



Square



Rectangle



U-Shape



T-Shape



Cross



Zed

3. LED LAMPING - DIRECT LIGHT

LOW - xxxxK	Linear LED strip, low output, LED 10W/M
STD - xxxxK	Linear LED strip, standard output, LED 20W/M
HI - xxxxK	Linear LED strip, high output, LED 30W/M

Note: Standard CCT: **3000K, 3500K, 4000K**; **CRI80 and CRI90** are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.

See page 8 for information of LED lamping output.

4. LED LAMPING - INDIRECT LIGHT (for LPL2ID only)

LOW - xxxxK	Linear LED strip, low output, LED 10W/M
STD - xxxxK	Linear LED strip, standard output, LED 20W/M
HI - xxxxK	Linear LED strip, high output, LED 30W/M

Note: Standard CCT: **3000K, 3500K, 4000K**; **CRI80 and CRI90** are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.


See page 8 for information of LED lamping output.

5. DRIVER (REMOTE ONLY)


STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options

6. SUSPENSION MOUNT CANOPY

RC	Canopy in round shape - suspended only
SC	Canopy in square shape - suspended only

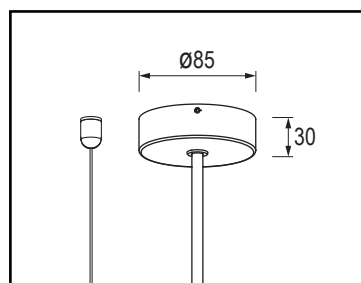

Round canopy

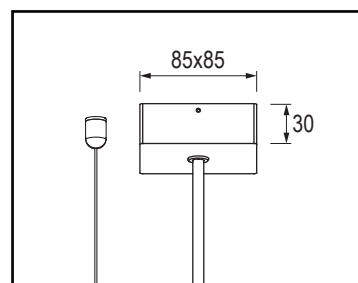

Square canopy

Lightplane Linear 2- LPL2SS PLUS

ZALITE

Suspended, Surface, Wall, Recessed

7. FINISH

BK	Matt black powercoat
WH	Matt white powercoat
SG	Silver grey powercoat
CF	Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom

8. OPTIONAL ADD-ONS

EM	1.5 hour emergency kit (remote only)
SS	PIR sensor
OTHERS	Consult factory for options

SPECIFICATION DETAILS


ROLLED PRISMATIC LENS

The optically engineered rolled prismatic lens provides smooth, uniform and seamless illumination for linear lengths of 30 meters while dynamically controlling output and reducing glare. The rolled prismatic lens rolls out and snaps into the housing profile for easy installation.



SLIDED SUSPENSION KIT

The fixture is designed with slided suspension kit for suspended mounting. The slided suspension kit provides flexible and convenient installation in field. It's available to change the position and quantity of suspension kits when the ceiling layout is changed during installation.

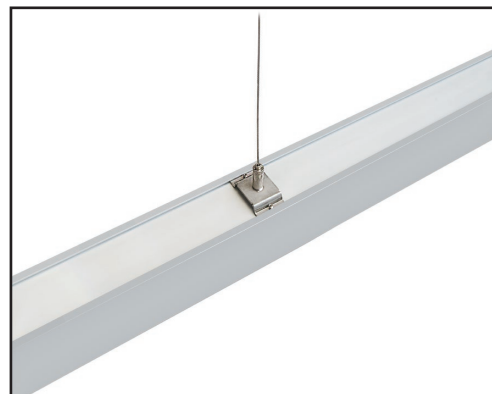

Lightplane Linear 2- LPL2SS PLUS

ZALITE

Suspended, Surface, Wall, Recessed

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
LPL2SS-LOW	1213	11	80 90	2700K 3000K 3500K 4000K 5000K 6500K	Prismatic lens,direct light
LPL2SS-STD	2397	22			Prismatic lens,direct light
LPL2SS-HI	3554	33			Prismatic lens,direct light
LPL2ID-LOW	2248	22			Prismatic lens, direct and indirect light
LPL2ID-STD	4352	44			Prismatic lens, direct and indirect light
LPL2ID-HI	6326	66			Prismatic lens, direct and indirect light
LPL2SS-R/RT -LOW	1213	11			Prismatic lens,direct light
LPL2SS-R/RT -STD	2397	22			Prismatic lens,direct light
LPL2SS-R/RT -HI	3554	33			Prismatic lens,direct light

Note: Performance data is based on a connected-load photometric test of 1.2 meter fixture output with STD and HI output with 90 CRI at 4000K using a non-dimmable driver. Data values for all other outputs are extrapolations.

LPL2SS

LPL2ID



More information and data,
please visit:
www.zalite.cn

V2.0_2025-05