


---

# LIGHTPLANE 1R - LPL1R


Indirect / Direct or Direct only

Suspended  
Wall

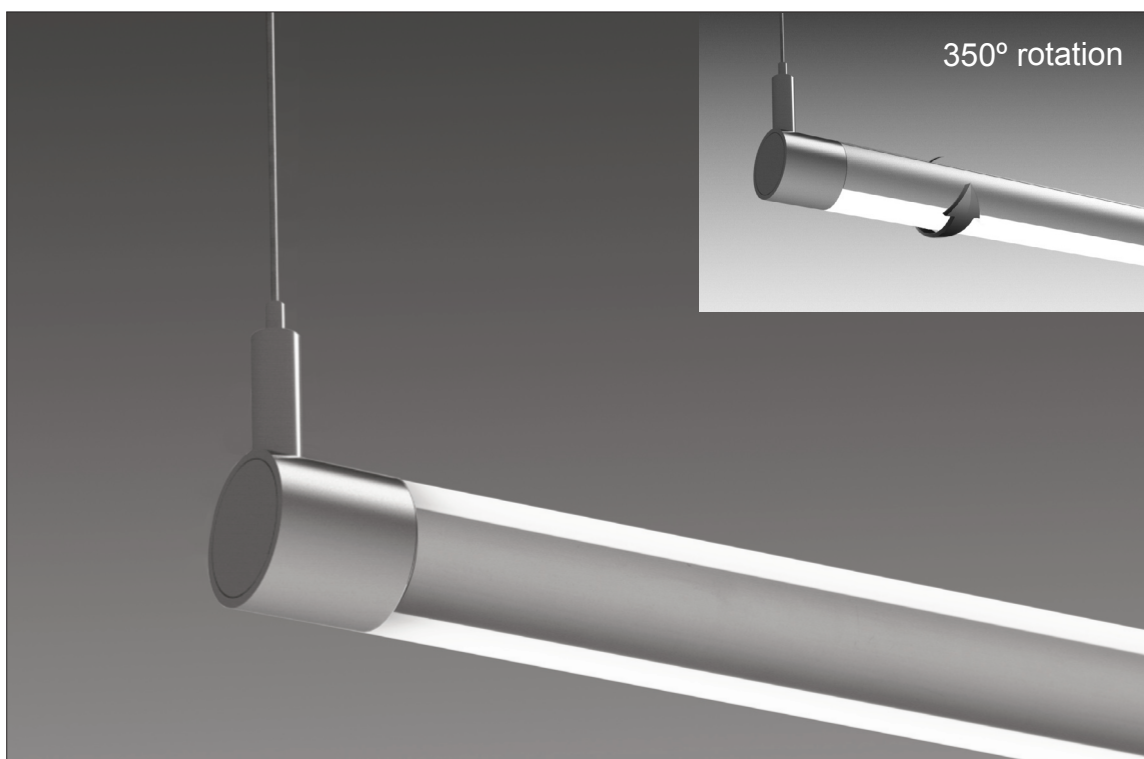

## Custom constructions (contact sales office for specifying)

CROSS, TEE, ANGLE connectors, and a SURFACE MOUNT are available to create multilayered geometric designs.

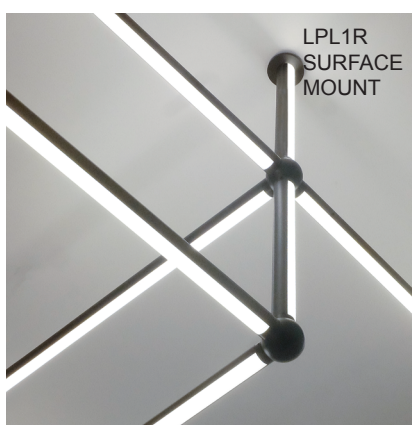

LPL1R CROSS



LPL1R TEE




LPL1R ANGLE



# LIGHTPLANE 1R — LPL1R

Suspended, Wall (Indirect / Direct or Direct only)

# ZALITE

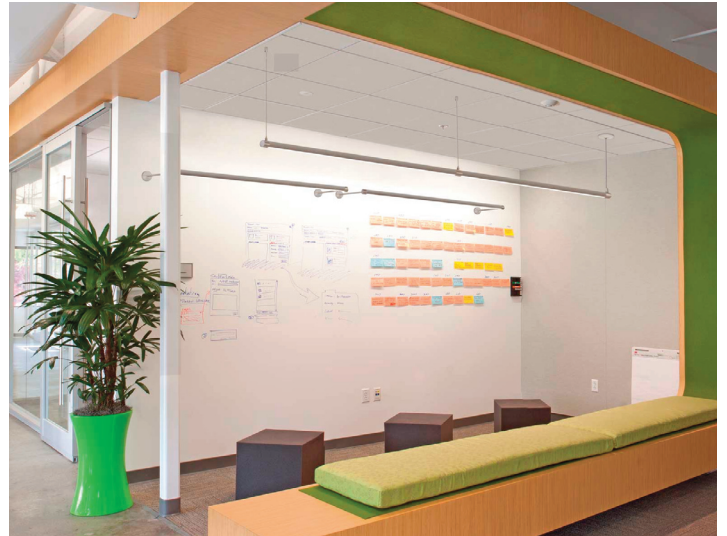

# LIGHTPLANE 1R — LPL1R


Suspended, Wall (Indirect / Direct or Direct only)

# ZALITE

## Dimensions


---

DIRECT



30mm ø diameter


INDIRECT / DIRECT



30mm ø diameter

## Distribution

---

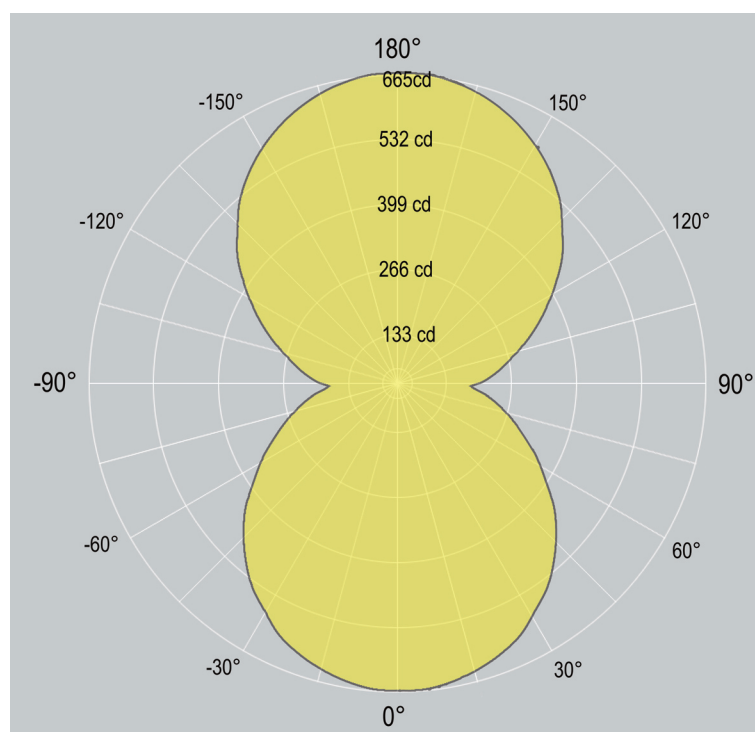

# LIGHTPLANE 1R — LPL1R




Suspended, Wall (Indirect / Direct or Direct only)


## 1. Base Model

LPL1R-SD	Suspended (direct only)
LPL1R-WMD.100	Wall Mounted 100mm arm (direct only)
LPL1R-WMD.175	Wall Mounted 175mm arm (direct only)
LPL1R-WMD.275	Wall Mounted 275mm arm (direct only)
LPL1R-SID	Suspended (indirect/direct)
LPL1R-WMID.100	Wall Mounted 100mm arm (indirect/direct)
LPL1R-WMID.175	Wall Mounted 175mm arm (indirect/direct)
LPL1R-WMID.275	Wall Mounted 275mm arm (indirect/direct)


LPL1R-SID  
Suspended - Indirect / Direct




LPL1R-WID  
Wall Mounted - Indirect / Direct

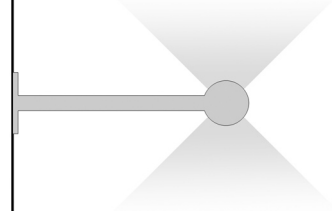

LPL1R-SD  
Suspended Direct



LPL1R-WD  
Wall Mounted - Direct

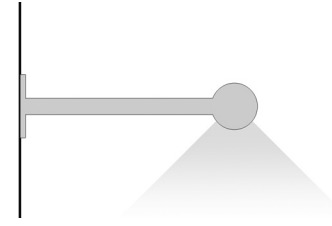

## 2. Run Length

Enter total linear length, (example: 6M)

## 3. LED Lamping (Indirect and Direct) - specify "NO-UP" for no indirect

STD - <b>xxxxK</b> (example: STD-4000K)	Standard Output, LED 2x20W/M 4100 delivered lm, 89 lm/W @ 4000K
HI - <b>xxxxK</b> (example: HI-4000K)	High Output, LED 2x30W/M 5950 delivered lm, 85 lm/W @ 4000K
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
CV - <b>xxxxK</b>	Additional LED Options Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail
TW	Tunable White (2700K - 6500K) Contact factory for detail
RGBW	RGB+WHITE - 24/12VDC Contact factory for detail

# LIGHTPLANE 1R — LPL1R

Suspended, Wall (Indirect / Direct or Direct only)

# ZALITE

---

## 5. LED Driver (remote only)

---

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

---

## 6. Finish

---

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

---

## 7. Additional options (remote only)

---

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

# LIGHTPLANE 1R — LPL1R

Suspended, Wall (Indirect / Direct or Direct only)

# ZALITE

---

## Housing

100% recyclable, extruded architectural grade T6063 aluminum

---

## Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.  
Consult factory for options.

---

## Options

### Mitered Corners

Consult factory for mitered corner angle options.

---


## Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




Suspension & Power

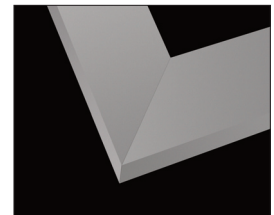

Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / \_\_\_\_

Default canopy finish  
is to match fitting color,  
unless otherwise  
specified



ISO 9001:2015