

LPLR1.5FT

Recessed




LPLR1.5FT


Recessed

ZALITE

Dimensions

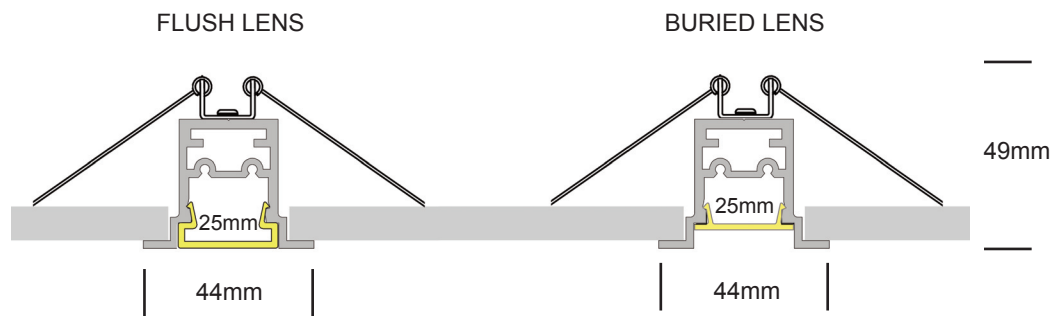

Distribution

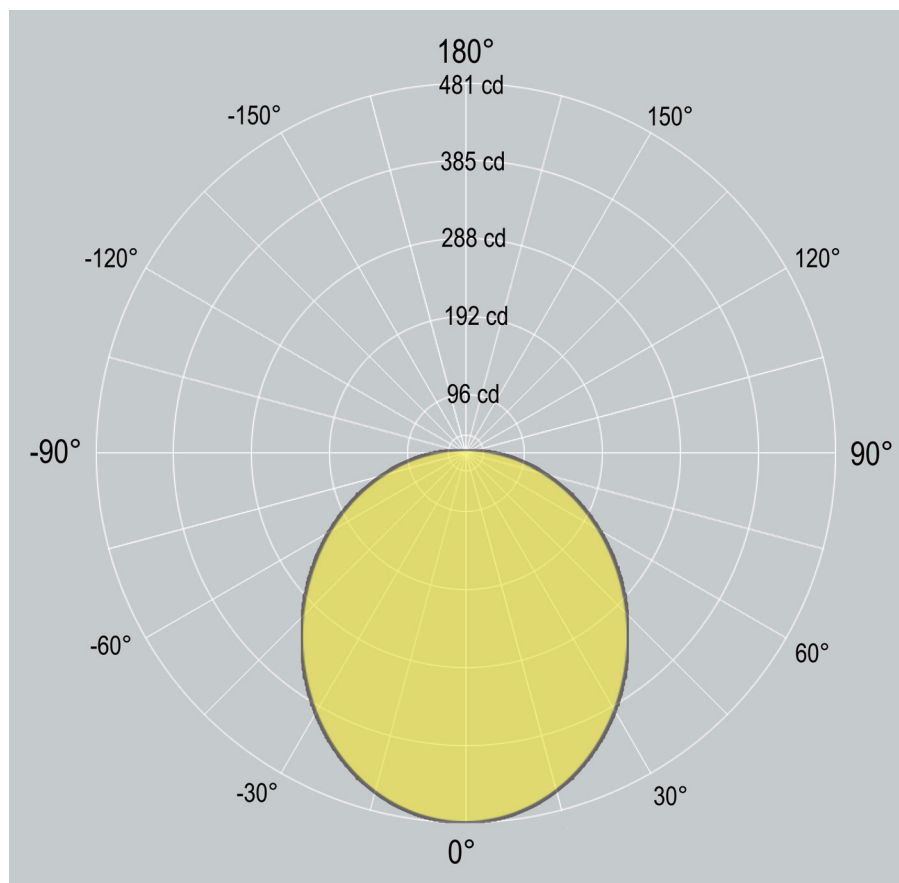

LPLR1.5FT

Recessed


ZALITE

1. Base Model

LPLR1.5FT

Recessed

LPLR1.5FT
Recessed



2. Run Length

Enter total linear length, (example: 6M)

3. LED Lamping

STD - **xxxxK** (example: STD-4000K)

Standard Output, LED 20 W/M, 1900 delivered lm/M , 66 lm/W @ 4000K

HI - **xxxxK** (example: HI-4000K)

High Output, LED 30 W/M, 2200 delivered lm/M, 63 lm/W @ 4000K

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - **xxxxK**

Additional LED Options

Constant Voltage (for custom lengths) - 12Vdc/24Vdc

Contact factory for detail

TW

Tunable White (2700K - 6500K)

Contact factory for detail

RGBW - **xxxxK**

Standard Output - RGB+WHITE - 12Vdc/24Vdc

Contact factory for detail

4. LED Driver

0/1-10V

0/ 1-10V dimming

DALI

DALI dimming

DMX

DMX dimming

NONDIM

Non-dimmable

OTHER

(Consult factory for options)

5. LENS

FLUSH

Flush lens

BURIED

Buried lens

6. Finish

AL

Standard, natural aluminum

BK

Black powdercoat

WH

White powdercoat

Custom

Custom Color

7. Additional options

EM

1.5 hour Emergency Kit

MS

Motion sensor

OTHER

Contact Factory

LPLR1.5FT

Recessed

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum


Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.



Mitered Corners


Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom/____



ISO 9001:2015