


---

LIGHTPLANE RECESSED WALL WASHER  
LPLRWWT


Recessed

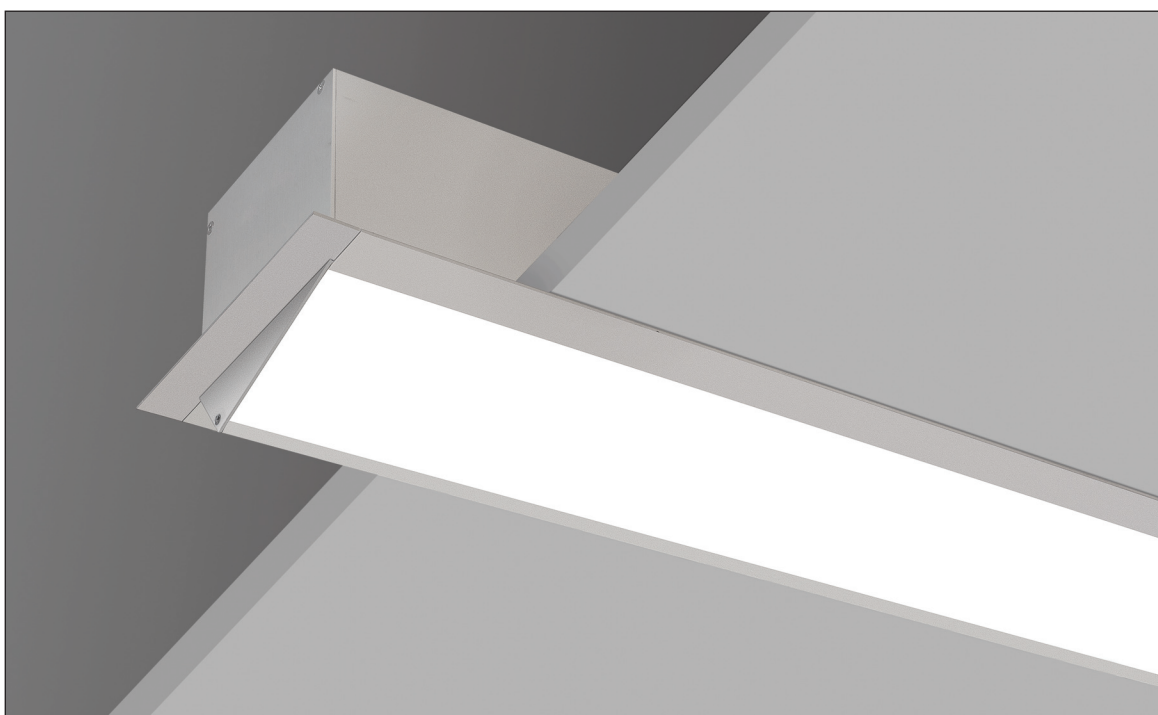


LIGHTPLANE RECESSED WALL WASHER  
LPLRWWT



Dimensions

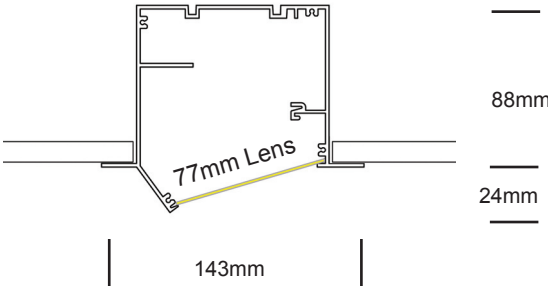

Distribution

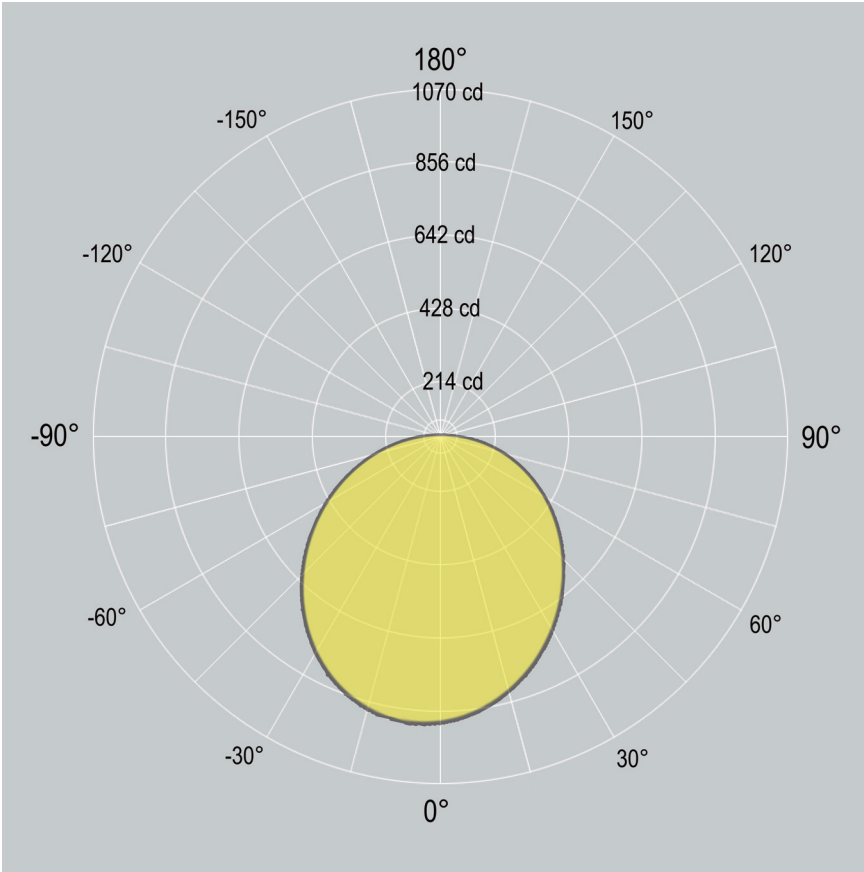


# LIGHTPLANE RECESSED WALL WASHER LPLRWWT



Recessed

## 1. Base Model

LPLRWWT	Recessed - with Trim
	<p>LPLRWWT Recessed</p> 

## 2. Run Length

	Enter total linear length, (example: 6M)
--	--

## 3. Lamping

	Single Row Linear LED
STD - <b>xxxxK</b>	Standard Output, LED 20W/M 2000 delivered lm/M, 85 lm/W @ 4000K
HI - <b>xxxxK</b>	High Output, LED 30W/M 2800 delivered lm/M, 81 lm/W @ 4000K
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
	Dual Row LED strip Available
	Additional Single Row LED Options
CV	Constant Voltage (for custom lengths) - 12Vdc/24Vdc Contact factory for detail
TW	Tunable White (2700K - 6500K) Contact factory for detail
RGBW	Standard Output - RGB+WHITE - 24Vdc/12Vdc Contact factory for detail

## 4. Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

## 5. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

## 6. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

# LIGHTPLANE RECESSED WALL WASHER LPLRWWT

# ZALITE

Recessed

---

## Housing

100% recyclable, extruded architectural grade T6063 aluminum

---

## Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.  
Consult factory for options.

---

## Options


### Mitered Corners

Consult factory for mitered corner angle options.

---

## Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.  
White, Black, Custom powdercoat options also available.



Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom/\_\_\_\_



ISO 9001:2015