


LPPUU

Direct / Indirect or Direct only panel light

Suspended
Surface

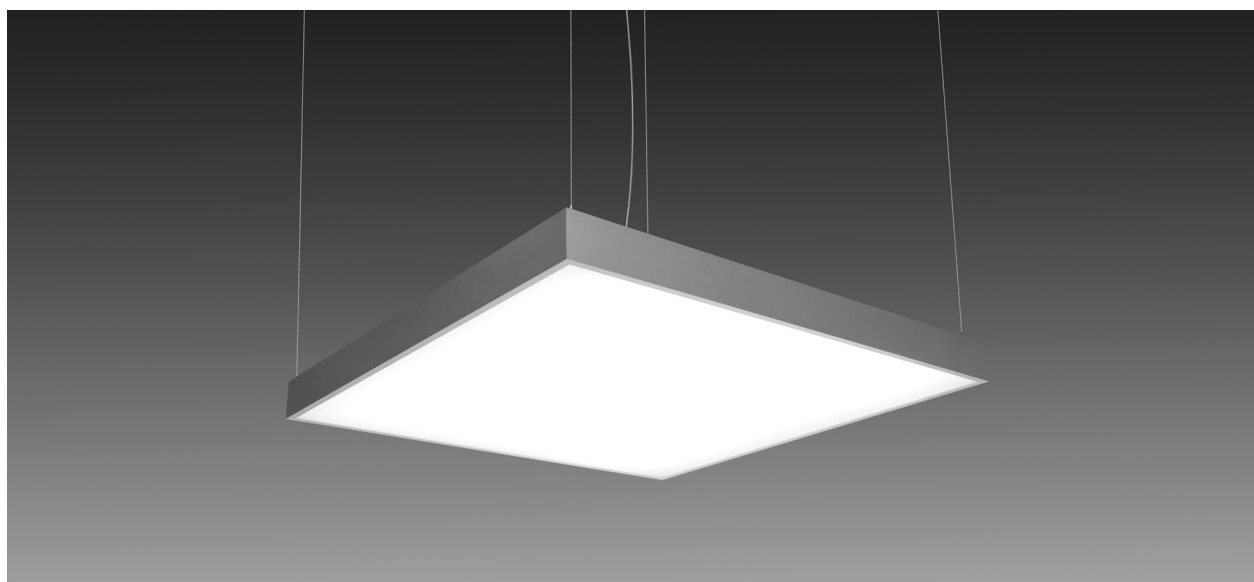


LIGHTPLANE PANEL — LPPUU


ZALITE

Suspended Panel (Direct or Indirect/Direct)


Dimensions

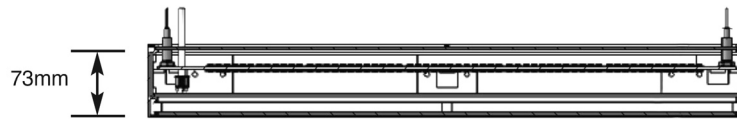

300 x 600mm
Direct only




600 x 600mm
Direct only




600 x 1100mm
Direct only



300 x 600mm
Indirect / Direct




600 x 600mm
Indirect / Direct



600 x 1100mm
Indirect / Direct



Distribution

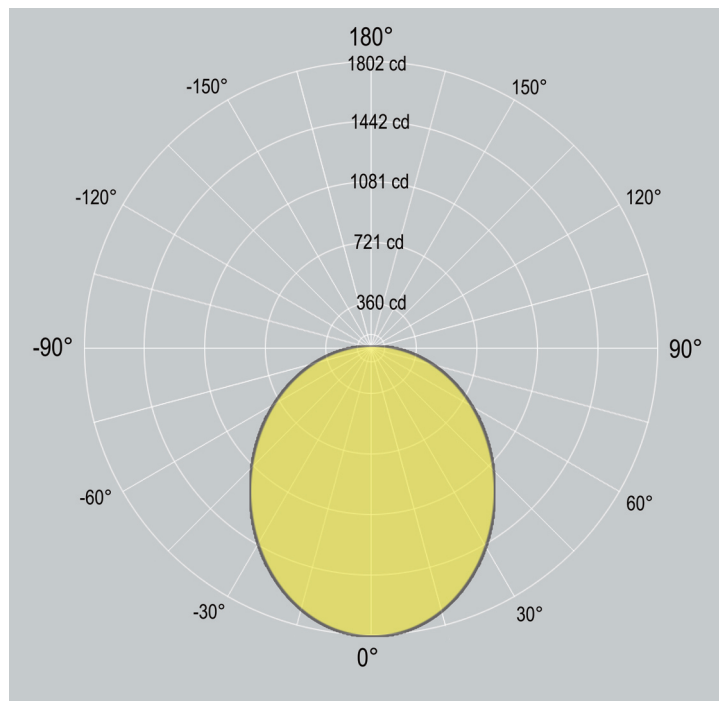

LIGHTPLANE PANEL — LPPUU

Suspended Panel (Direct or Indirect/Direct)

ZALITE

1. Base Model

LPPUU - SD	Suspended (Direct)
LPPUU - SID	Suspended (Indirect / Direct)
LPPUU - SM	Surface Mounted (Direct)

2. Size

300 x 600mm	Contact factory for custom sizes
600 x 600mm	
600 x 1100mm	

3. LED

(Data shown for a 600 x 600mm section down only)

STD	LED board size 300x300, 4600 delivered lm/M, 124 lm/W@4000K
-----	---

4. LED Driver (direct - Integral on top) (direct/indirect - remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom / ____	Specify Custom powdercoat

6. Additional options (remote only)

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHTPLANE PANEL — LPPUU

Suspended Panel (Direct or Indirect/Direct)

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish


Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.
White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015