

LIGHTPLANE ROUND 3 - LPR3

Indirect / Direct


Suspended
Wall

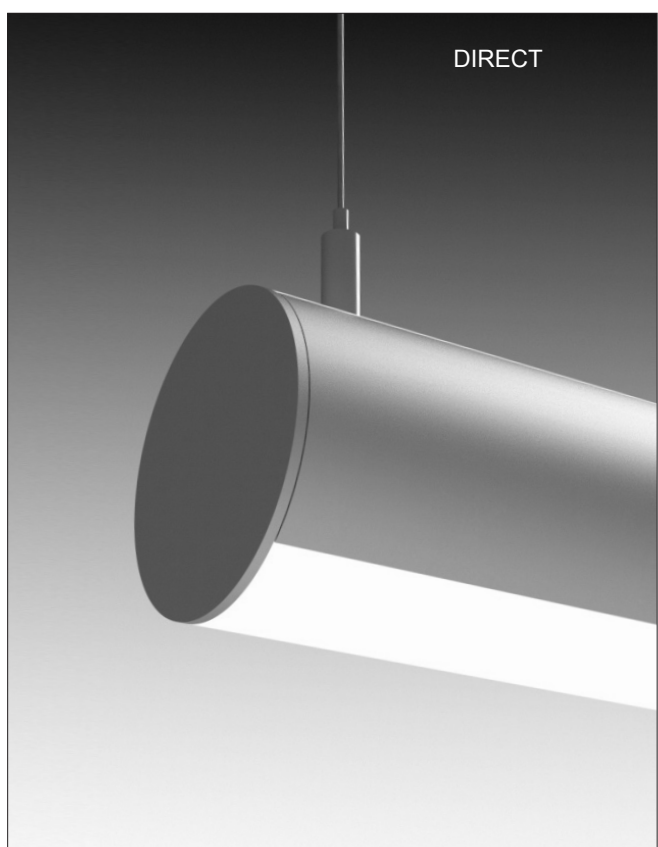

LIGHTPLANE ROUND 3 - LPR3

INDIRECT / DIRECT - Suspended, Wall Mounted

ZALITE

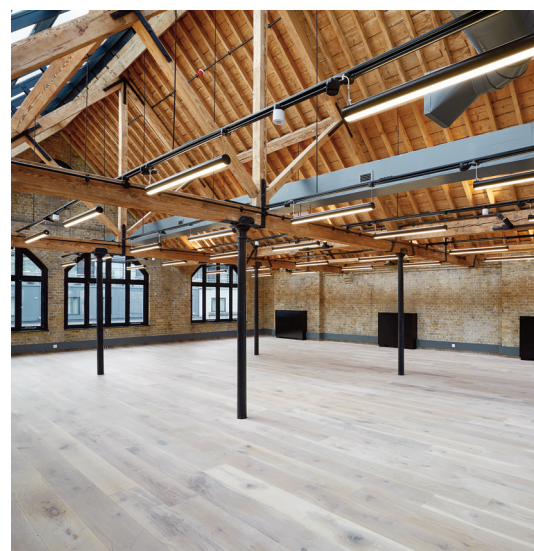


LIGHTPLANE ROUND 3 - LPR3


INDIRECT / DIRECT - Suspended, Wall Mounted



Dimensions

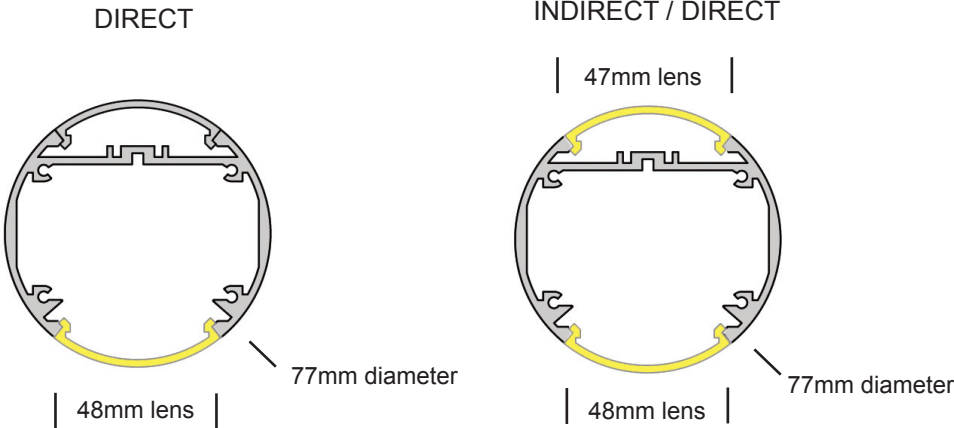

Distribution

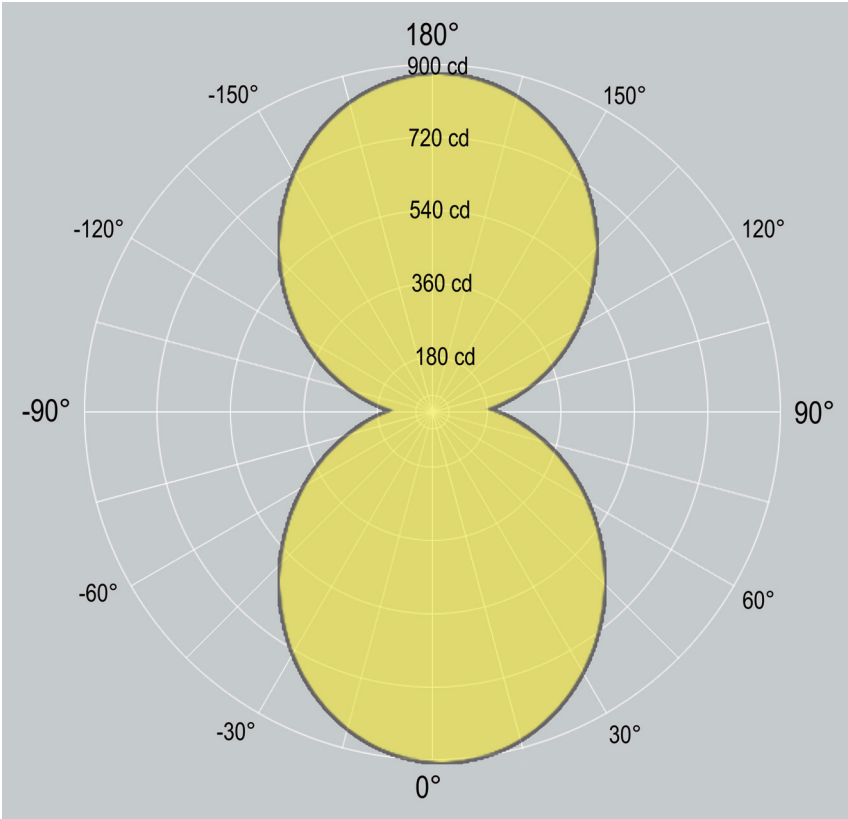

LIGHTPLANE ROUND 3 - LPR3


INDIRECT / DIRECT - Suspended, Wall Mounted

ZALITE


1. Base Model

LPR3-SD	Suspended (Direct)
LPR3-WMD-150ARM	Wall Mounted Direct - 150mm wall arm
LPR3-WMD-300ARM	Wall Mounted Direct - 300mm wall arm
LPR3-WMD-450ARM	Wall Mounted Direct - 450mm wall arm
LPR3-WMD-600ARM	Wall Mounted Direct - 600mm wall arm
<hr/>	
LPR3-SID	Suspended (Indirect / Direct)
LPR3-WMID-150ARM	Wall Mounted Indirect/Direct - 150mm wall arm
LPR3-WMID-300ARM	Wall Mounted Indirect/Direct - 300mm wall arm
LPR3-WMID-450ARM	Wall Mounted Indirect/Direct - 450mm wall arm
LPR3-WMID-600ARM	Wall Mounted Indirect/Direct - 600mm wall arm


LPR3-SD
Suspended Direct




LPR3-WMD
Wall Mount Direct

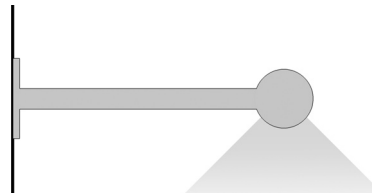

LPR3-SID
Suspended Indirect / Direct



LPR3-WMID
Wall Mount Indirect / Direct

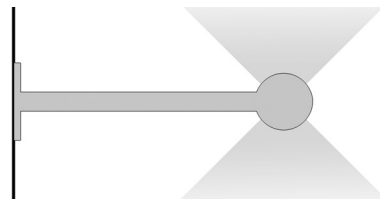

2. Run Length

Enter total linear length, (example: 6M)

LIGHTPLANE ROUND 3 - LPR3



INDIRECT / DIRECT - Suspended, Wall Mounted

3. LED Lamping (indirect) - specify "NOUP for no indirect lamping

STD - xxxxK (example: STD-4000K)	Standard Output, LED 2x20W/M 4150 delivered lumen, 89 lm/W
HI - xxxxK (example: HI-4000K)	High Output, LED 2x30W/M 6000 delivered lumen, 85 lm/W
	CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K
	Additional LED Options
CV - xxxxK	Constant Voltage (for custom lengths) 24/12VDC Contact factory for detail
TW	Tunable White (2700K - 6500K) Contact factory for detail
RGBW	RGB+WHITE - 24/12VDC Contact factory for detail

5. LED Driver

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

6. Lens

EXT	Standard lens
-----	---------------

7. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom/ ____	Specify Custom powdercoat

8. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHTPLANE ROUND 3 - LPR3

INDIRECT / DIRECT - Suspended, Wall Mounted

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015