

## SPEC SHEET

---



## FEATURES


- Custom length
- White acrylic lens with soft illumination
- Remoted driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

## MOUNTING


- Suspend, Surface, Wall



## DIMENSIONS

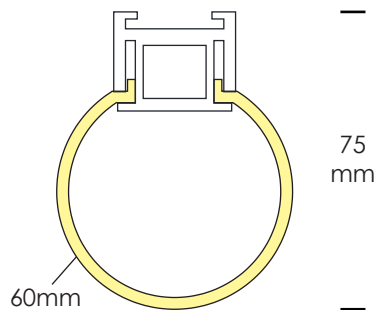


## Distributions

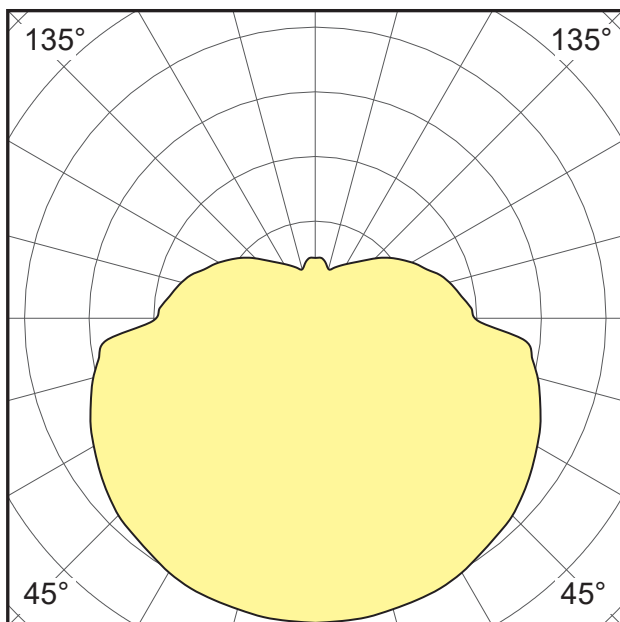

## ORDERING INFO

### 1. BASIC MODEL

LIGHTROD60-S	Suspended
LIGHTROD60-SM	Surface Mount
LIGHTROD60-WM	Wall Mount

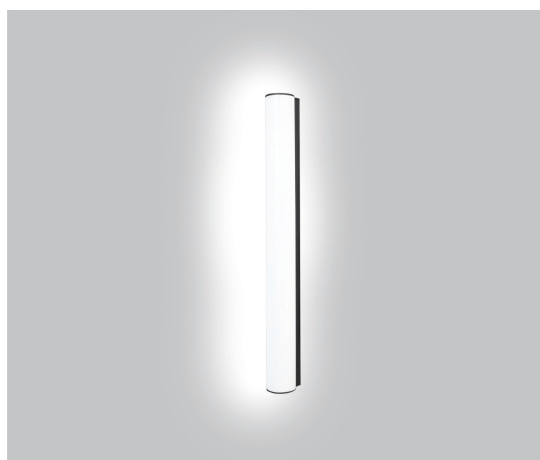

Wall Mount

### 2. SIZE AND SHAPE

**xxxxmm** Specify the length in mm. Actual length may vary slightly.

*Note: Max single length is 5M.*

### 3. LED LAMPING - DIRECT LIGHT

<b>LOW - xxxxK</b>	Linear LED strip, standard output, LED 10W/M
<b>STD - xxxxK</b>	Linear LED strip, low output, LED 15W/M
<b>MED - xxxxK</b>	Linear LED strip, standard output, LED 20W/M
<b>HI - xxxxK</b>	Linear LED strip, high output, LED 30W/M

*Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.*


*Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.*

## 4. DRIVER


<b>STD</b>	Non-dimmable
<b>0/1-10V</b>	1-10V / 0-10V dimming
<b>DALI</b>	DALI dimming
<b>DMX</b>	DMX dimming
<b>OTHER</b>	Consult factory for options

## 5. SUSPENSION MOUNT CANOPY

<b>RC</b>	Canopy in round shape - suspended only
<b>SC</b>	Canopy in square shape - suspended only

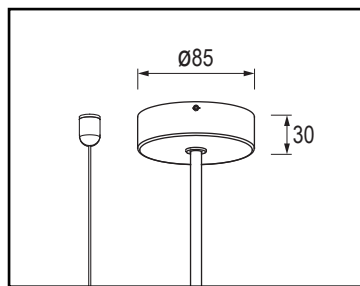

Round canopy

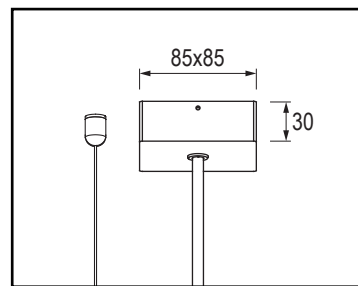


Square canopy

## 6. FINISH

<b>BK</b>	Matt black powercoat
<b>WH</b>	Matt white powercoat
<b>SG</b>	Silver grey powercoat
<b>CF</b>	Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom

## 7. OPTIONAL ADD-ONS

<b>EM</b>	1.5 hour emergency kit (remote only)
<b>SS</b>	PIR sensor
<b>OTHERS</b>	Consult factory for options

**SPECIFICATION DETAILS**

**PERFORMANCE DATA - LED LAMPING**

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
LOW-3000K	895	11	80 90	2700K 3000K 3500K 4000K 5000K 6500K	Linear LED, 3000K
STD-3000K	1290	16			Linear LED, 3000K
MED-3000K	1753	22			Linear LED, 3000K
HI-3000K	2565	34.7			Linear LED, 3000K
LOW-4000K	948	11			Linear LED, 4000K
STD-4000K	1366	16			Linear LED, 4000K
MED-4000K	1857	22			Linear LED, 4000K
HI-4000K	2717	34.7			Linear LED, 4000K

*Note: Data provided is from a photometric test of 1 meter hex fixture output with 90CRI at 4000K using a non-dimmable driver.*



More information and data,  
please visit:  
[www.zalite.cn](http://www.zalite.cn)

V1.0\_2024-11