
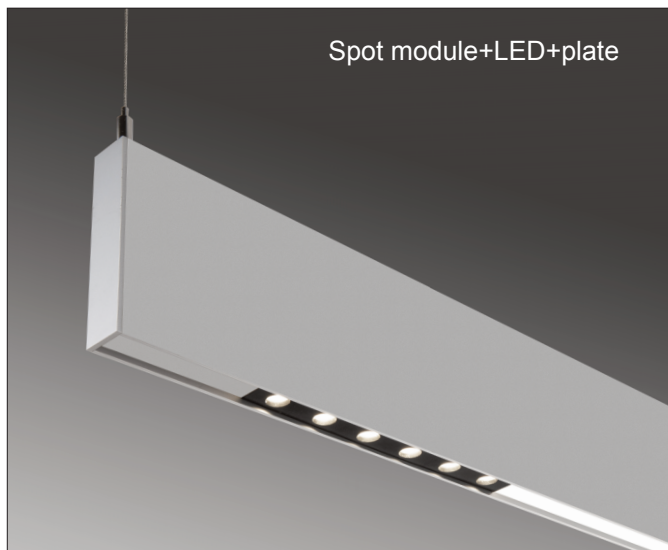
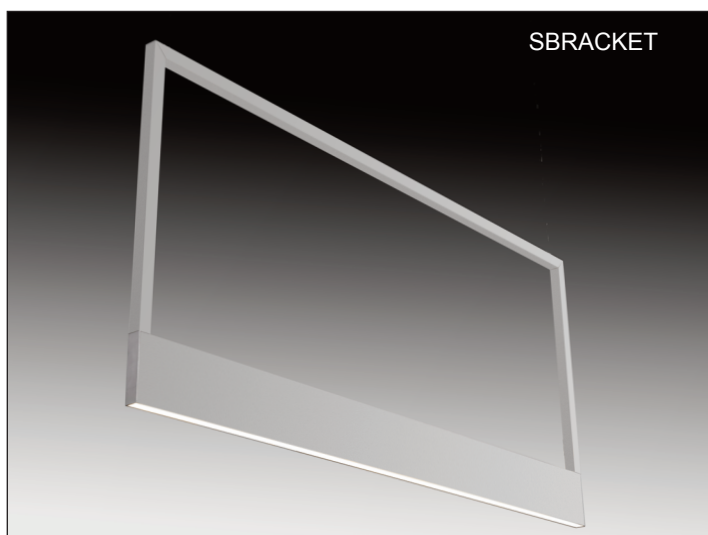


MICRO-HB

Indirect / Direct with optional spots

Suspended
Wall

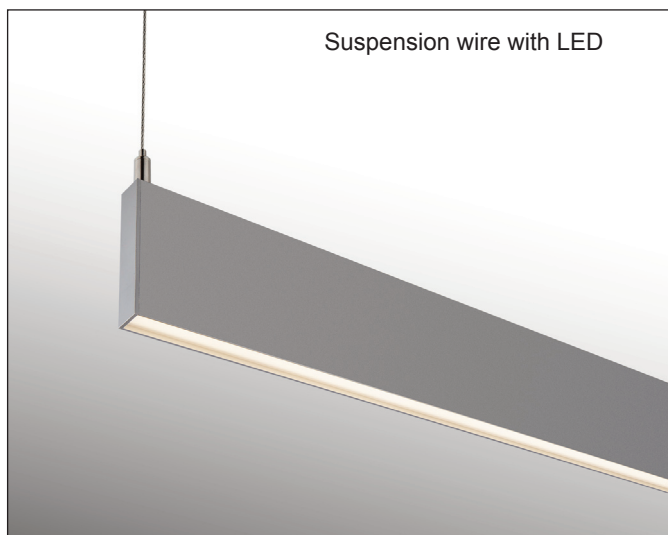


MICRO-HB


INDIRECT / DIRECT with optional spots - Suspended, Wall Mount

ZALITE

Dimensions

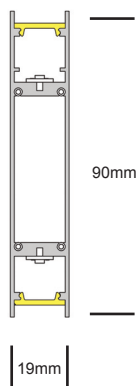

Distribution

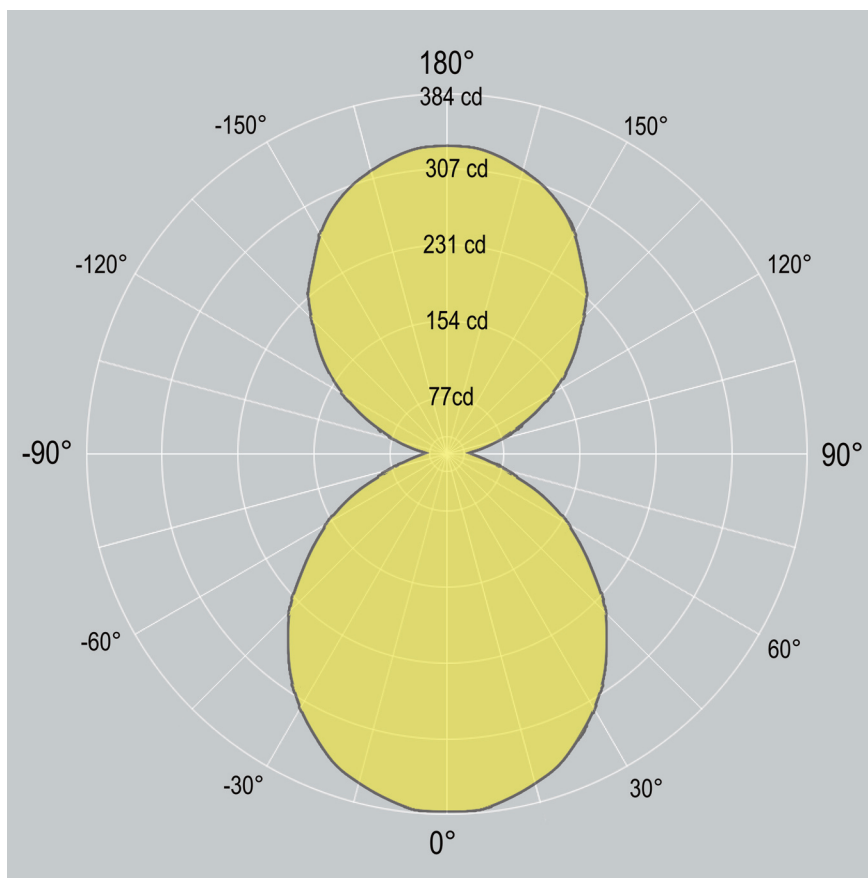

MICRO-HB


INDIRECT / DIRECT with optional spots - Suspended, Wall Mount




1. Base Model

MICRO-HB-S	Suspended (Indirect / Direct)
MICRO-HB-SBRACKET	Suspended Bracket Mount
MICRO-HB-WM	Wall Mounted (Indirect / Direct)

MICRO-HB-S & MICRO-HB-SBRACKET
Suspended Indirect/Direct



MICRO-HB-WM
Wall Mount Indirect/Direct



2. Run Length

Enter total linear length, (example: 6M)

3. LED Lamping (indirect)

STD - **xxxxK** (example: STD-4000K) Standard Output, LED 2x20W/M 1900 delivered lm, 43 lm/W @ 4000K

HI - **xxxxK** (example: HI-4000K) High Output, LED 2x30W/M 2850 delivered lm, 41 lm/W @ 4000K

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K


CV - **xxxxK** Additional LED Options
Constant Voltage (for custom lengths) 24/12VDC
Contact factory for detail

TW Tunable White (2700K - 6500K)
Contact factory for detail

RGBW RGB+WHITE - 24/12VDC
Contact factory for detail

4. SPOTS - optional

xxxSPOTS Specify the number of 6-lamp spot modules in the run
6-lamp spot module: 15W, 61 lm/w, 900 delivered lumen, CCT 4000K
Beam angle: 25° 40° 60° 80° 100° 30x65°

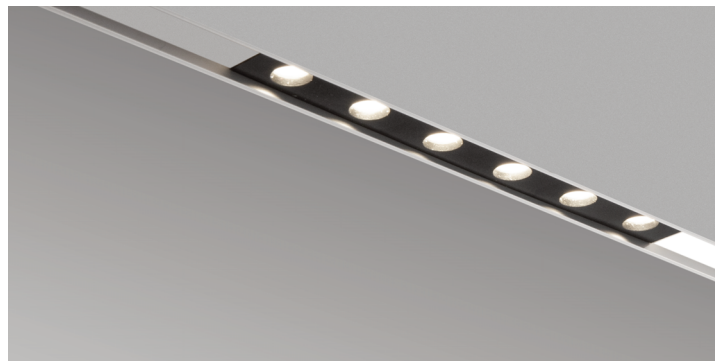


MICRO-HB

INDIRECT / DIRECT with optional spots - Suspended, Wall Mount



5. DOWNLIGHTS - optional(Enter Q'ty of Downlights)

STD Downlight(2W 3V)	Adjustable downlight, 105 lm/w 210delivered lumen
LG Downlight(2W 3V)	Low glare downlight (With longer sleeves), 61 lm/w 122 delivered lumen

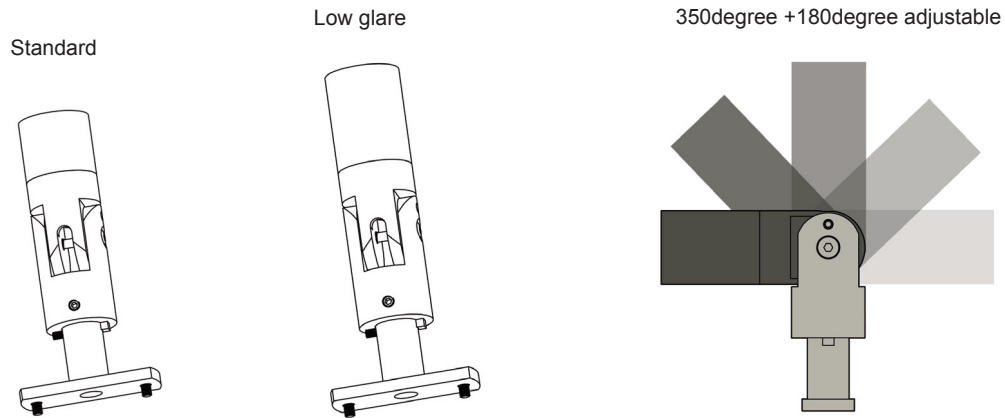

6. LED Driver (remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

7. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

8. Additional options (remote only)

EM	1.5 H Emergency Kit - remote
MS	Motion sensor
Others	Contact factory

MICRO-HB

INDIRECT / DIRECT with optional spots - Suspended, Wall Mount

ZALITE

Housing


100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish


Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.
White, Black, Custom powdercoat options also available.

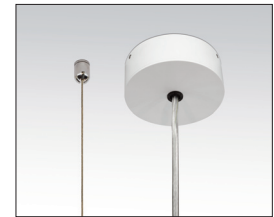

Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015