


MICRO-R & MICRO-RT

Recessed Trimless
Recessed with Trim

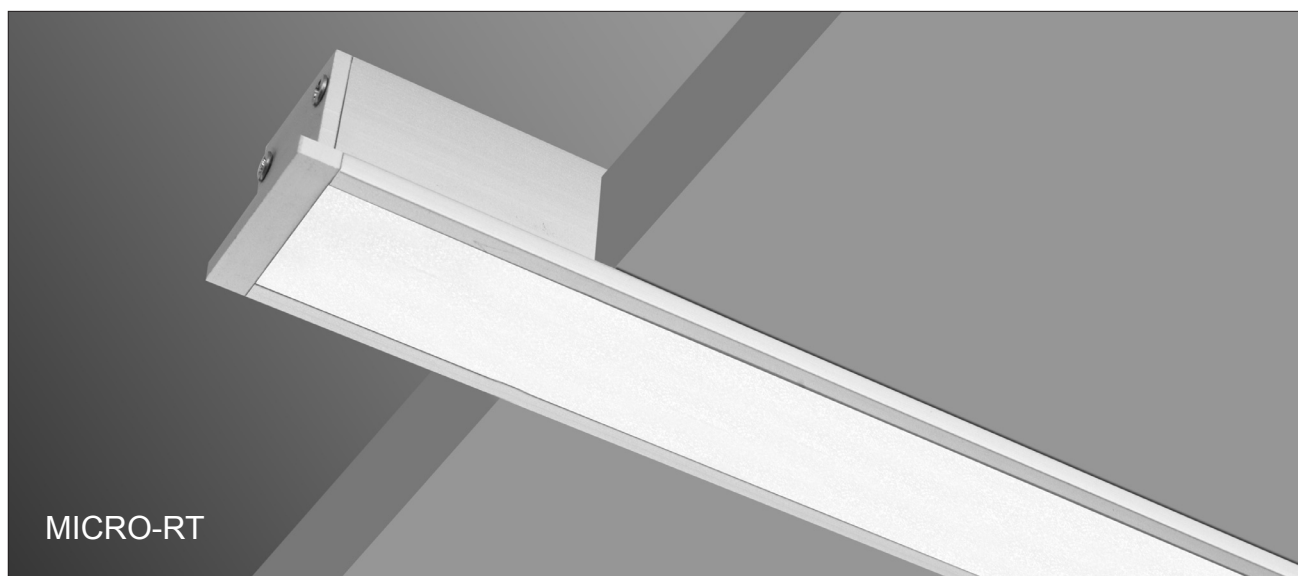
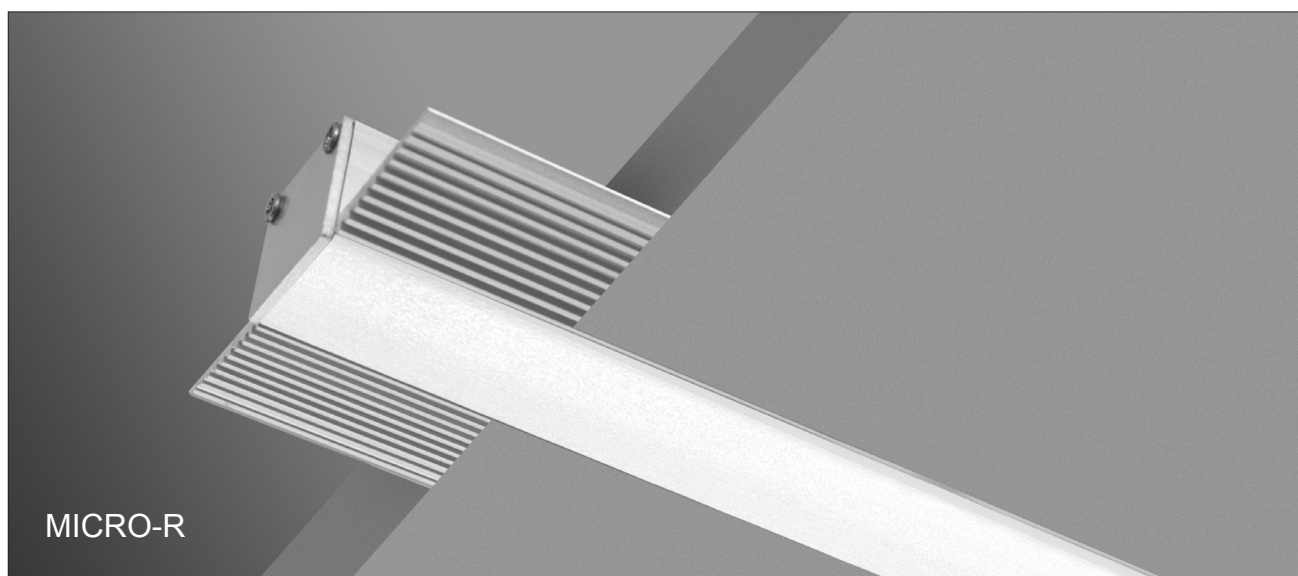


MICRO-R & MICRO-RT


Recessed Trimless - Recessed with Trim

LIGHT FORMS

Dimensions

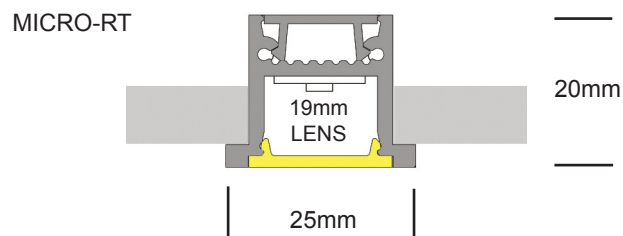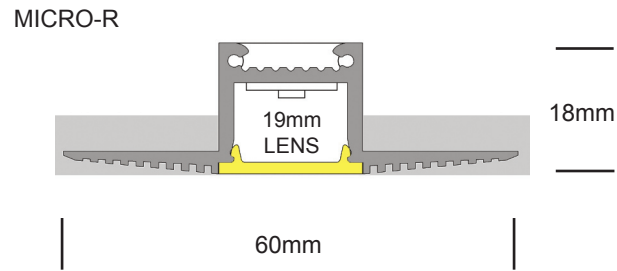

Distribution

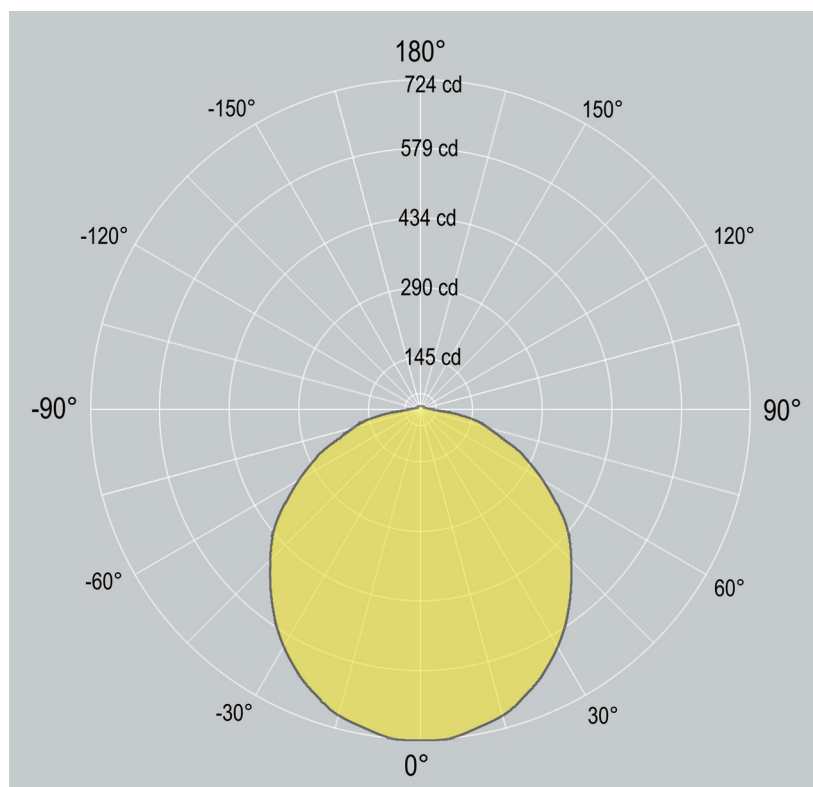

MICRO-R & MICRO-RT


Recessed Trimless - Recessed with Trim

LIGHT FORMS

1. Base Model

MICRO-R	Recessed - (Trimless)
MICRO-RT	Recessed - (with Trim)

MICRO-R & MICRO-RT
Recessed



2. Run Length

Enter total linear length, (example: 6M)

3. LED Lamping

STD - xxxxK (example: STD-4000K)	Standard Output, LED 20 W/M, 2100 delivered lm/M , 92 lm/W @ 4000K
---	--

HI - xxxxK (example: HI-4000K)	High Output, LED 30 W/M, 3045 delivered lm/M, 87 lm/W @ 4000K
---------------------------------------	---

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - xxxxK

Additional LED Options
Constant Voltage (for custom lengths) - 12Vdc/24Vdc

TW

Contact factory for detail
Tunable White (2700K - 6500K)

RGBW - xxxxK

Contact factory for detail
Standard Output - RGB+WHITE - 12Vdc/24Vdc
Contact factory for detail

4. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

5. LED Driver (remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

6. Additional options (remote only)

EM	1.5 Hour Emergency Kit - remote
MS	Motion sensor
Others	Contact factory

MICRO-R & MICRO-RT

Recessed Trimless - Recessed with Trim

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Custom powdercoat options also available.



Suspension & Power



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015