


MR1SS-S-1200-CIRCLE-SSTD-LSTD-STD-BK

Features

- Direct-indirect distribution
- Low UGR (<12) reflector design
- Rolled soft acrylic lens presents seamless continuous light
- Custom curved or straight shapes and configurations
- Remote driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting

- Suspended, surface, recessed





Moonring 1 Snake Spot - MR1SS

ZALITE

Suspended, Surface, Recessed

PHOTOS

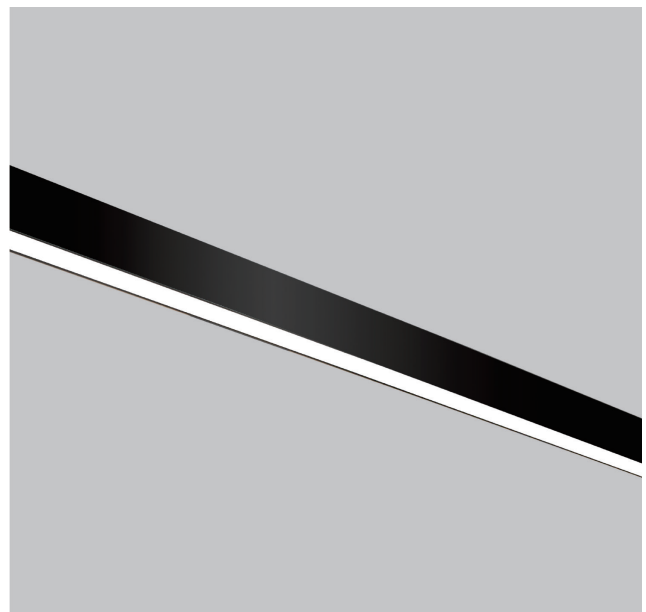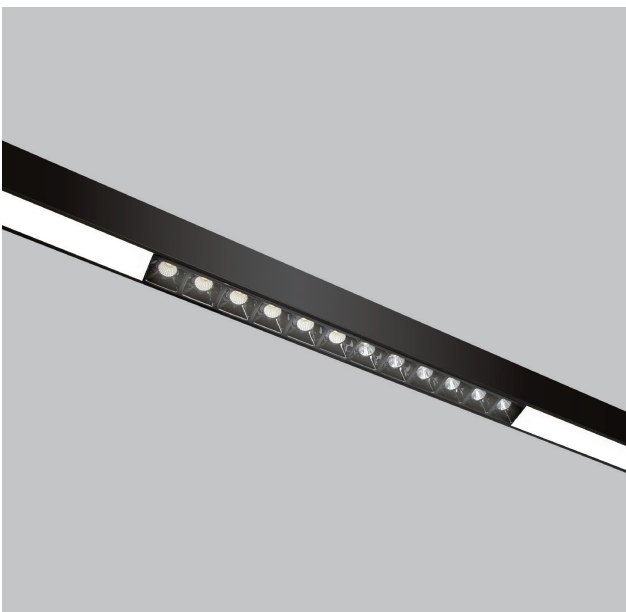


Moonring 1 Snake Spot - MR1SS


ZALITE

Suspended, Surface, Recessed


Dimensions

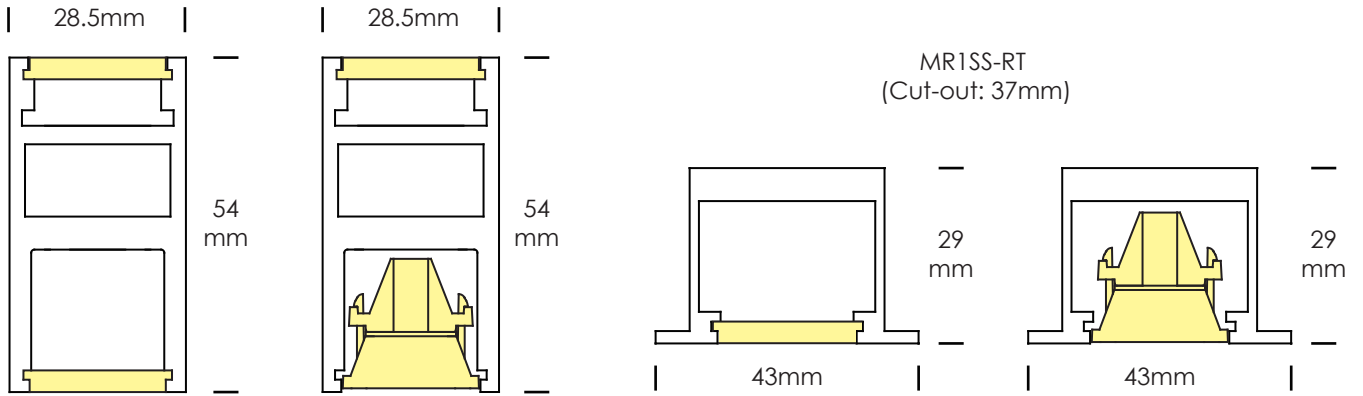


Distributions

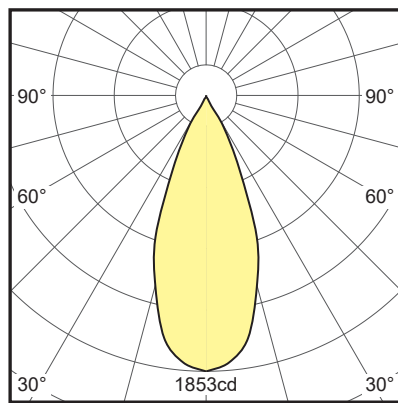


Spot cluster- direct

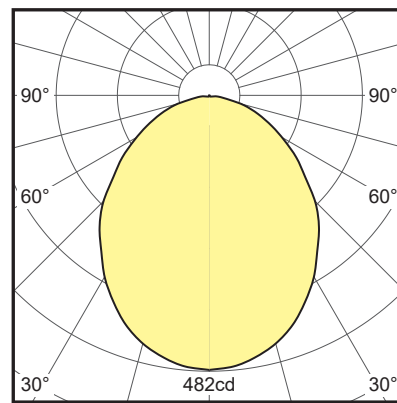

LED strip- direct

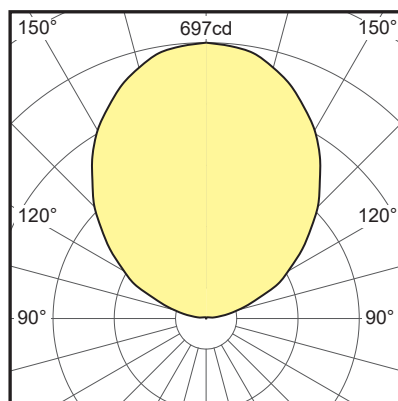

LED strip- indirect

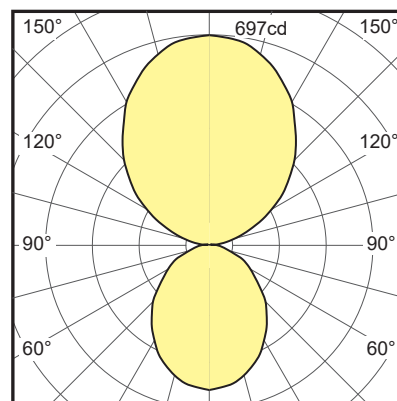

LED strip-direct and indirect

Ordering Info


1. BASIC MODEL

MR1SS-S	Suspended - direct / indirect / direct-indirect
MR1SS-SM	Surface mount - direct only
MR1SS-RT	Recessed with trim- direct only


2. SIZE AND SHAPE

xxxxmm - CIRCLE	Circle - specify outside diameter in mm
xxxxmm - HCIRCLE	Half circle - specify outside diameter in mm
xxxxmm - 1/4 ARC	Quarter arc - specify outside diameter in mm
xxxxmm - STR	Straight - specify length in mm
xxxxmm - Special Shape	Radom connection of sectional circle, arc and straight


* Sample configuration diagrams as below.




Circle




Rounded Rectangle




Stadium Oval



Serpentine

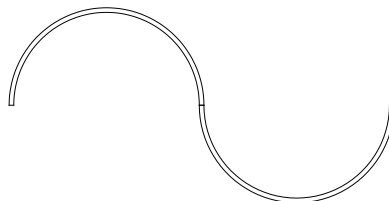

S-Shape

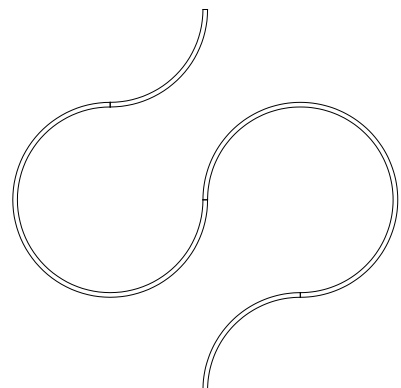

Curve

Moonring 1 Snake Spot - MR1SS

Suspended, Surface, Recessed


3. LED LAMPING - DIRECT LIGHT

L - STD - xxxxK	Linear LED strip, standard output, LED 20W/M
L - HI - xxxxK	Linear LED strip, high output, LED 30W/M
S - STD - xxxxK	Spot cluster, standard output, LED 6W per cluster
S - HI - xxxxK	Spot cluster, high output, LED 12W per cluster
NONE	No Linear LED strip or spot cluster, with blank spacer plate

Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.

See page 7 for more specification of spot cluster, see page 8 for information of LED lamping output.

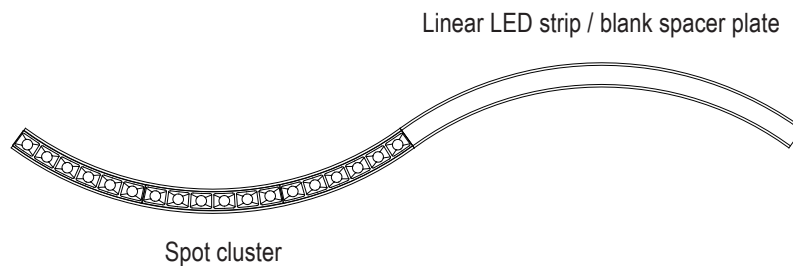

4. LED LAMPING - INDIRECT LIGHT

L - STD - xxxxK	Linear LED strip, standard output, LED 20W/M
L - HI - xxxxK	Linear LED strip, high output, LED 30W/M
NONE	DIRECT-ONLY fixture

Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, TUNE(2700K-6500K). Contact factory for details.

See page 7 for more specification of spot cluster, see page 8 for information of LED lamping output.

5. DRIVER (REMOTE ONLY)

STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options


Moonring 1 Snake Spot - MR1SS

ZALITE


Suspended, Surface, Recessed

6. SUSPENSION MOUNT CANOPY


RC	Canopy in round shape - suspended only
SC	Canopy in square shape - suspended only
PS	Powered suspension kits, no canopy- suspended only

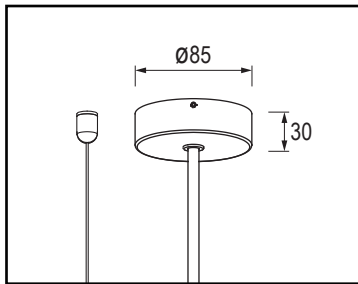

Round canopy

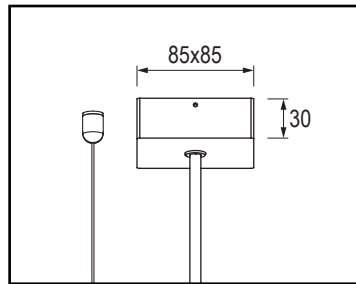

Square canopy

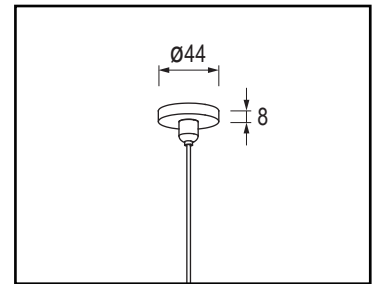

Powered suspension kit

7. FINISH

BK	Matt black powercoat
WH	Matt white powercoat
SG	Silver grey powercoat
CF	Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom


8. OPTIONAL ADD-ONS

EM	1.5 hour emergency kit (remote only)
SS	PIR sensor
OTHERS	Consult factory for options

SPECIFICATION DETAILS


SPOT CLUSTER

Spot Cluster is a series of straight and arc module with reflector and 6pcs Osram LED. Reflector is designed with 20 degrees and 48 degrees distribution and UGR<12. The series includes 5 different outside diameters - $\phi 600\text{mm}$, $\phi 800\text{mm}$, $\phi 1200\text{mm}$, $\phi 1500\text{mm}$, $\phi 1800\text{mm}$ - provides more configuration designs.

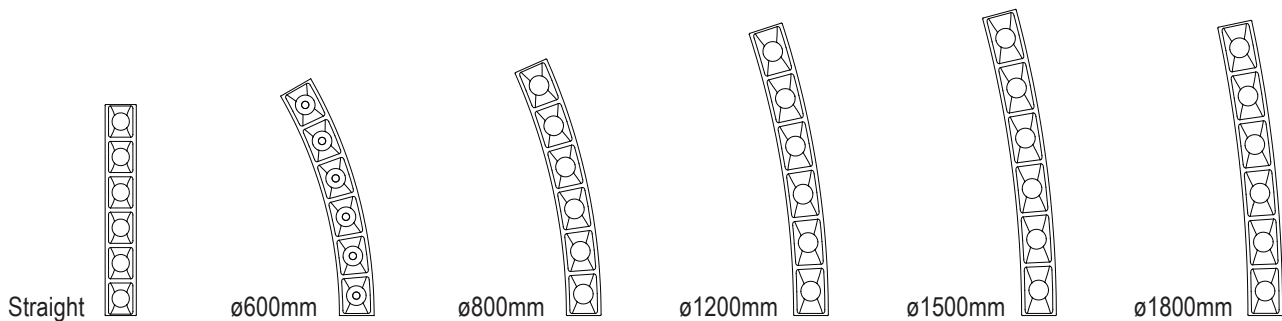

ROLLED LENS

The optically engineered rolled soft acrylic lens provides smooth, uniform and seamless illumination for linear lengths of 30 meters while dynamically controlling output and reducing glare. The soft acrylic lens rolls out and snaps into the housing profile for easy installation.

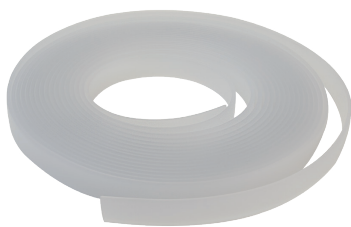

Rolled soft acrylic lens



Moonring 1 Snake Spot - MR1SS

ZALITE

Suspended, Surface, Recessed

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
L-STD	2744	47.6	80 90	2700K 3000K 3500K 4000K 5000K 6500K	LED strip, direct-indirect light
L-HI	3845	72			LED strip, direct-indirect light
L-STD-D	1045	23.8			LED strip, direct light only
L-HI-D	1464	36			LED strip, direct light only
S-STD	537	7.7	80		Spot cluster
S-HI	933	15.8	80		Spot cluster

*Note: Data provided for LED strip options is from a photometric test of 1 meter fixture output with 90CRI at 4000K using a non-dimmable driver.
Data provided for spot cluster options is from a photometric test of one set of spot cluster output with 80CRI at 4000K using a non-dimmable driver.*



*More information and data,
please visit:
www.zalite.cn*

V3.0_2023-12