



Features




- 360-degree illumination
- Custom curved or straight shapes and configurations
- Remote driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting


- Suspended, surface, wall




PHOTOS

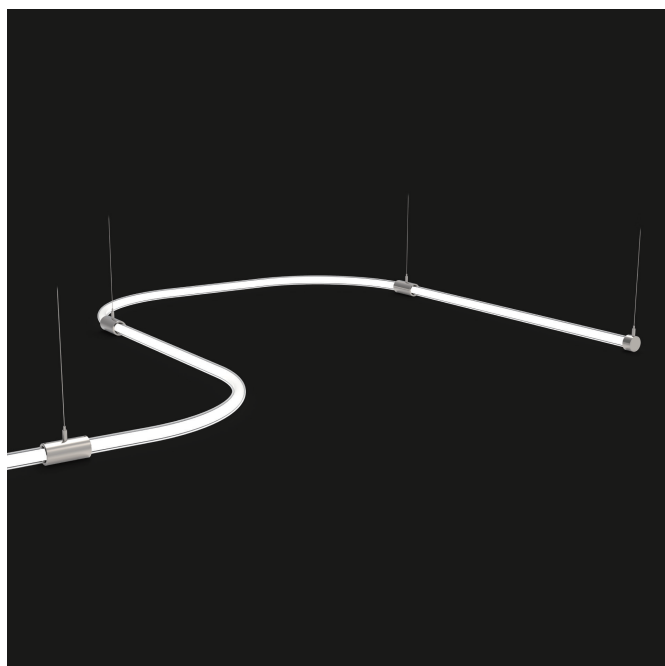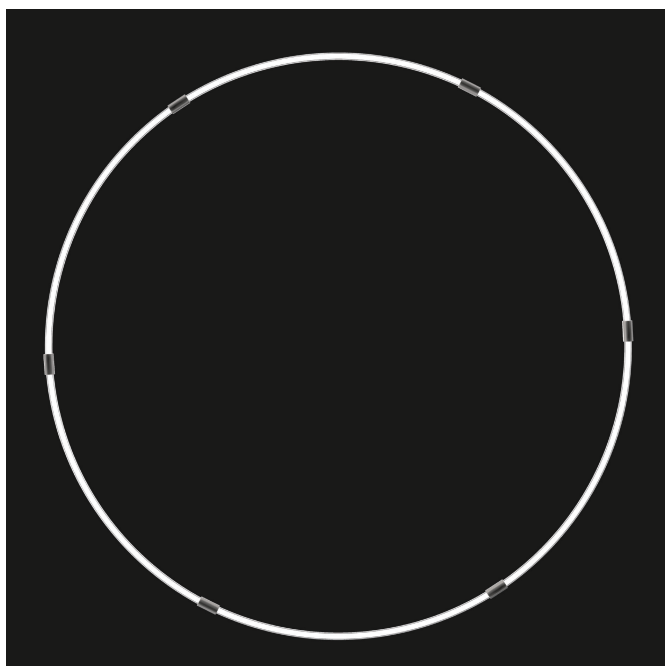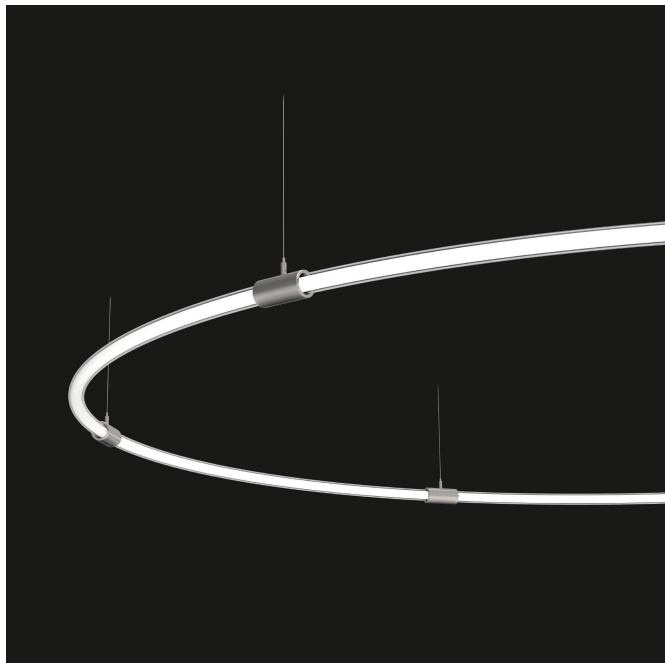

Dimensions

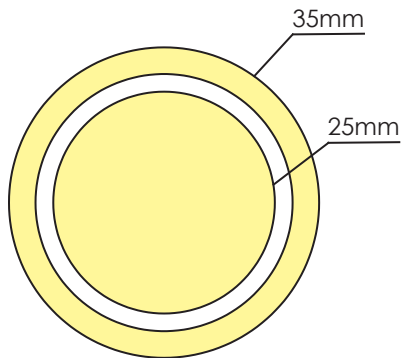

Distributions

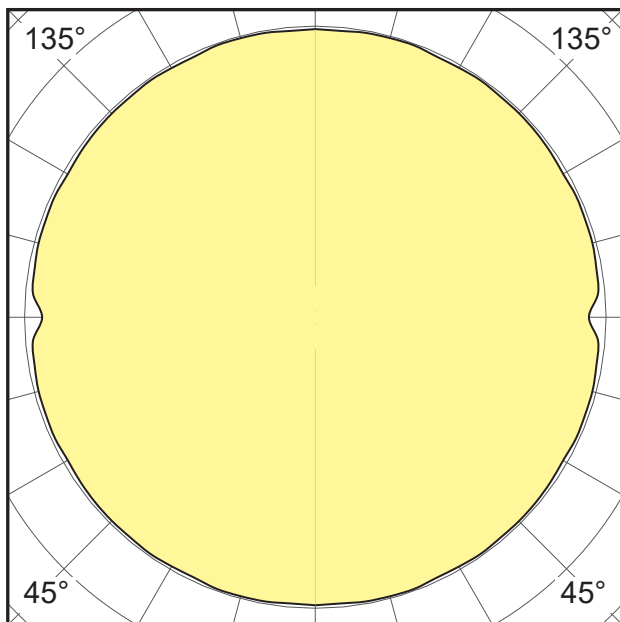


4. DRIVER (REMOTE ONLY)


STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options

5. SUSPENSION MOUNT CANOPY


RC	Canopy in round shape - suspended only
SC	Canopy in square shape - suspended only
PS	Powered suspension kits, no canopy- suspended only

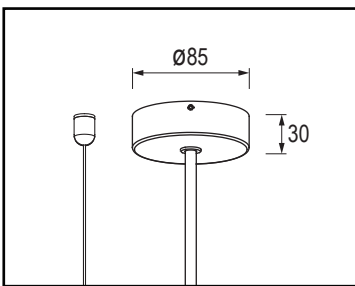

Round canopy

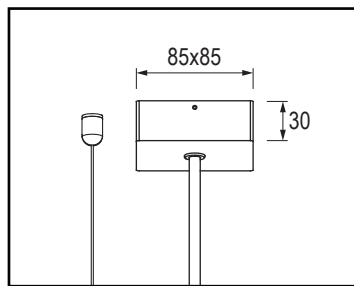

Square canopy

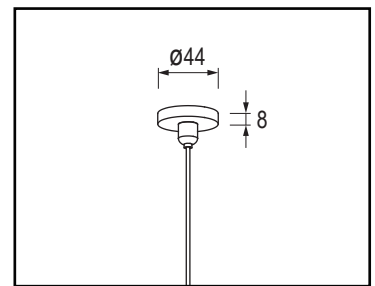


Powered suspension kit

6. FINISH

BK	Matt black powercoat
WH	Matt white powercoat
SG	Silver grey powercoat
CF	Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey

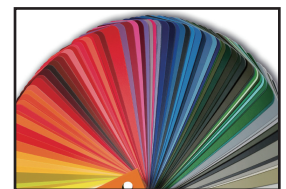

Custom

7. OPTIONAL ADD-ONS

EM	1.5 hour emergency kit (remote only)
SS	PIR sensor
OTHERS	Consult factory for options

SPECIFICATION DETAILS

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
STD-2700K	770	14	80 90	2700K 3000K 3500K 4000K 5000K 6500K	14W/meter
STD-3000K	810	14			14W/meter
STD-4000K	833	14			14W/meter
STD-6000K	833	14			14W/meter

Note: Data provided is from a photometric test of diameter 1 meter fixture output with 90CRI at 4000K using a non-dimmable driver.



More information and data,
please visit:
www.zalite.cn

V1.0_2025-09