




FEATURES




- Oval glass housing
- Integrated driver, dim or non-dim available
- Wide range of colors
- 100% recyclable, extruded architectural grade T6063 aluminum

DIMENSIONS

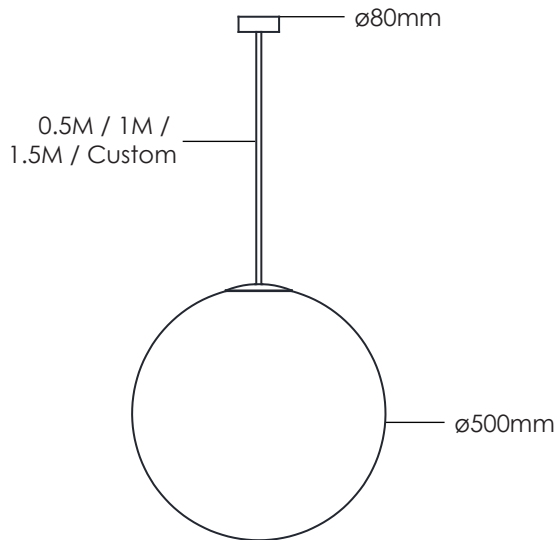


Remoted Driver

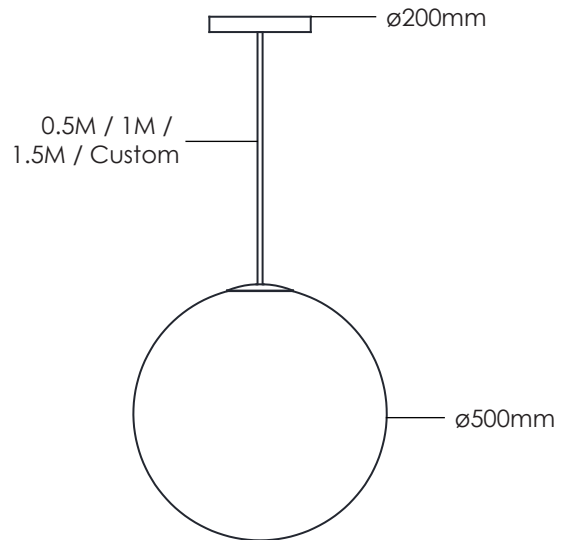

Integrated Driver

DISTRIBUTIONS

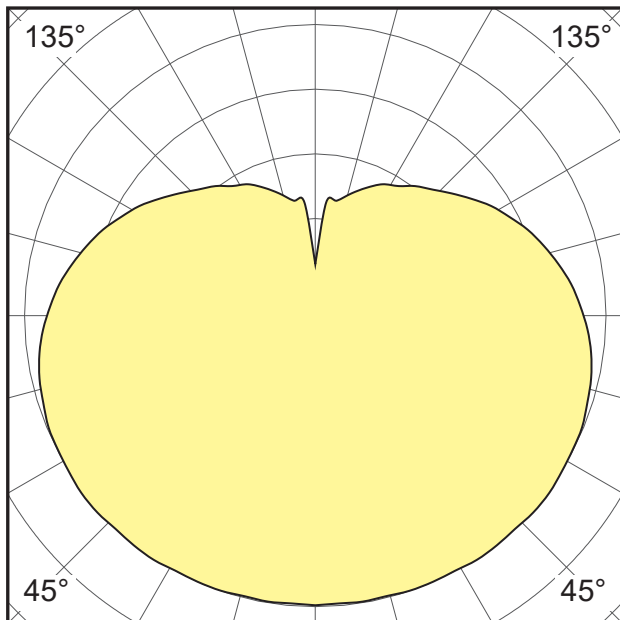

ORDERING INFO

VENUS500 - STD



LIGHT DISTRIBUTION	330°
LED TUBE LUMENS	3850lm@3000K / 4100lm@4000K
EFFICACY	Up to 124lm/W
CCT	3000K / 3500K / 4000K / RGBW
CRI	> 90
POWER	33W
DIMMING	Non-dim / 0/1-10V / DALI
INPUT	220-240V AC
SIZE	φ500mm ball
ROD LENGTH	0.5M / 1M / 1.5M / Custom length
FINISH	See color codes as shown

VENUS500 - HI



LIGHT DISTRIBUTION	330°
LED TUBE LUMENS	5050lm@3000K / 5400lm@4000K
EFFICACY	Up to 120lm/W
CCT	3000K / 3500K / 4000K / RGBW
CRI	> 90
POWER	45W
DIMMING	Non-dim / 0/1-10V / DALI
INPUT	220-240V AC
SIZE	φ500mm ball
ROD LENGTH	0.5M / 1M / 1.5M / Custom length
FINISH	See color codes as shown

VENUS 500

Suspended

ZALITE

VENUS500 - E27



LIGHT DISTRIBUTION	330°
LIGHT SOURCE	LED bulb
BULB BASE	E27
INPUT	220-240V AC
SIZE	φ500mm ball
ROD LENGTH	0.5M / 1M / 1.5M / Custom length
FINISH	See color codes as shown

COLOR CODE

PLATED



Polish Chrome (PC)



Polish Gold (PG)

POWDER COAT



Matt Black (BK)



Matt White (WH)



Silver Grey (SG)



Custom Finish(CF)



More information and data,
please visit:
www.zalite.cn

V1.0_2025-12