



## Features

- Clear glass housing
- High-precision reflectors for guaranteed glare-free light
- Integral heat sink for passive cooling
- Remote driver, dim or non-dim available
- Wide range of colors



220-240V




DIM




IP20

RoHS

## DIMENSIONS

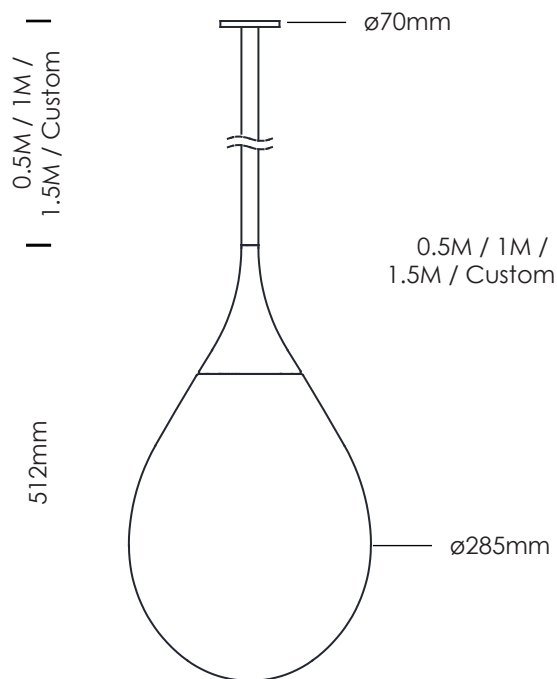

## DISTRIBUTIONS

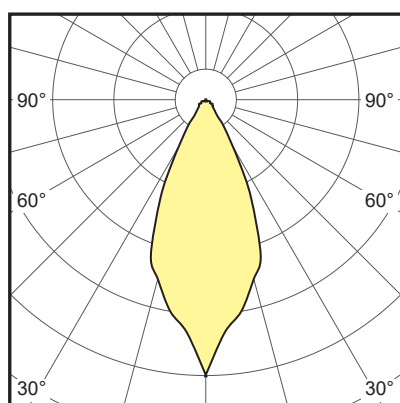

## ORDERING INFO

### RUPERT - STD



<b>LIGHT DISTRIBUTION</b>	Direct
<b>DELIVERED LUMENS</b>	1796lm@3000K / 1942lm@4000K
<b>EFFICACY</b>	Up to 97lm/W
<b>CCT</b>	3000K / 3500K / 4000K
<b>CRI</b>	> 90
<b>POWER</b>	20W
<b>DIMMING</b>	Non-dim / 0/1-10V / DALI
<b>INPUT</b>	220-240V AC
<b>ROD LENGTH</b>	0.5M / 1M / 1.5M / Custom length
<b>SIZE</b>	φ285x512mm
<b>FINISH</b>	See color codes as shown

### RUPERT - HI



<b>LIGHT DISTRIBUTION</b>	Direct
<b>DELIVERED LUMENS</b>	2514lm@3000K / 2718lm@4000K
<b>EFFICACY</b>	Up to 97lm/W
<b>CCT</b>	3000K / 3500K / 4000K
<b>CRI</b>	> 90
<b>POWER</b>	28W
<b>DIMMING</b>	Non-dim / 0/1-10V / DALI
<b>INPUT</b>	220-240V AC
<b>ROD LENGTH</b>	0.5M / 1M / 1.5M / Custom length
<b>SIZE</b>	φ285x512mm
<b>FINISH</b>	See color codes as shown

## COLOR CODE

### PLATED



Polish Chrome (PC)




Polish Gold (PG)

### POWDER COAT



Matt Black (BK)



Matt White (WH)



Silver Grey (SG)



Custom Finish(CF)



*More information and data,  
please visit:  
[www.zalite.cn](http://www.zalite.cn)*

V1.0\_2025-12